



## RECESSED T-BAR INSTALLATION INSTRUCTIONS FOR 1x4, 2X2, 2X4 DIRECTIVES D'INSTALLATION POUR PROFILÉ EN T ENCASTRÉ POUR 1x4, 2x2, 2x4

**NOTE:** ENSURE THAT THE POWER TO THE FIXTURE'S CIRCUIT IS TURNED OFF. / VEUILLEZ VOUS ASSURER QUE L'ALIMENTATION DU LUMINAIRE EST COUPÉE AU CIRCUIT.

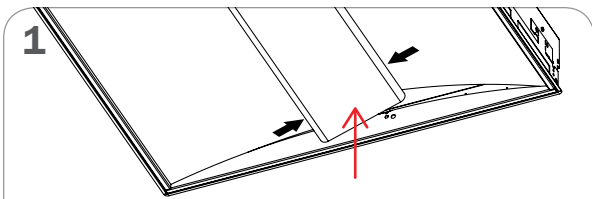







DETAIL SECTION VIEW / DÉTAIL DE LA VUE TRANSVERSALE



SQUEEZE LIGHTLY ON CENTER LENS SIDES WHILE PUSHING UP SLIGHTLY AND ROTATING LENS UNTIL ONE SIDE OF LENS IS FREE, THEN LOWER. PULL ON SIDE LENS TO REMOVE OPTICAL ENTIRELY FROM FIXTURE.

COMPRIMER LÉGÈREMENT LES CÔTÉS DE LA LENTILLE AU CENTRE TOUT EN POUSSANT DOUCEMENT ET EN FAISANT PIVOTER LA LENTILLE JUSQU'À CE QU'UN CÔTÉ DE LA LENTILLE SE LIBÈRE, PUIS ABAISSER. TIRER SUR LE CÔTÉ DE LA LENTILLE POUR RETIRER COMPLÈTEMENT L'OPTIQUE DU LUMINAIRE.

LUMINAIRE IS PACKED WITH FOAM INSERTS TO PROTECT LENS FROM DAMAGE. REMOVE BEFORE INSTALLING FIXTURE. / LES LUMINAIRES SONT EMBALLÉS AVEC DE LA MOUSSE DE REMBOURRAGE POUR ÉVITER D'ENDOMMAGER LES LENTILLES. VEUILLEZ ENLEVER LA MOUSSE AVANT D'INSTALLER LE LUMINAIRE.

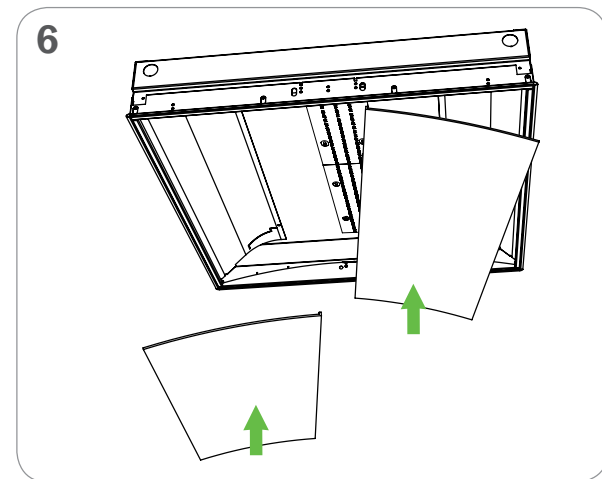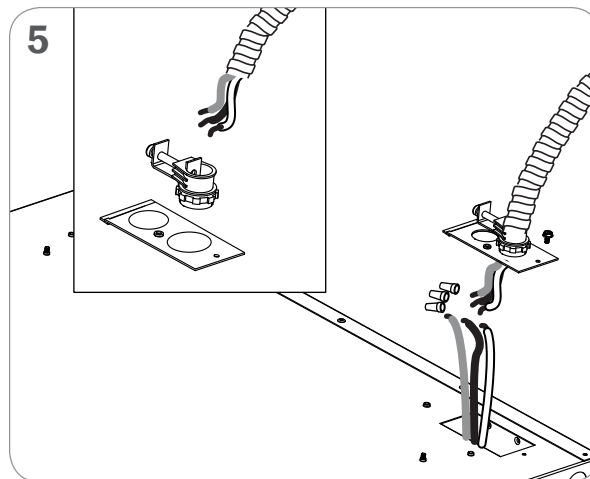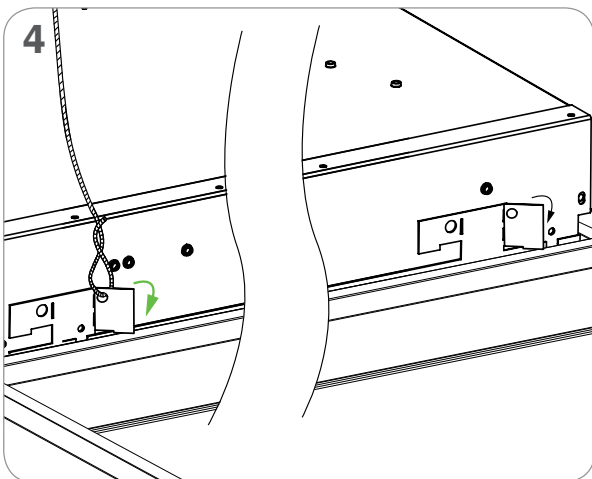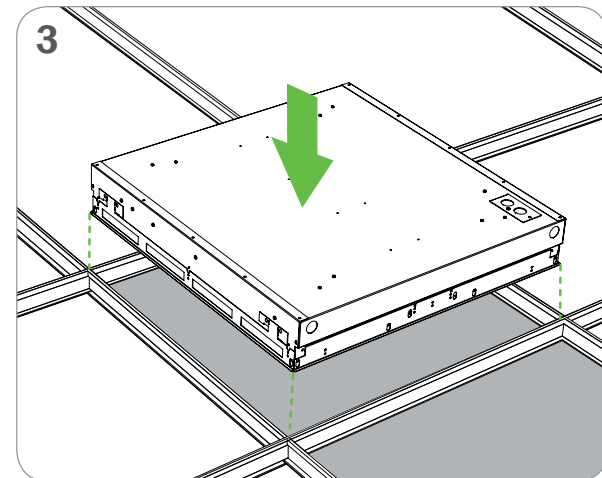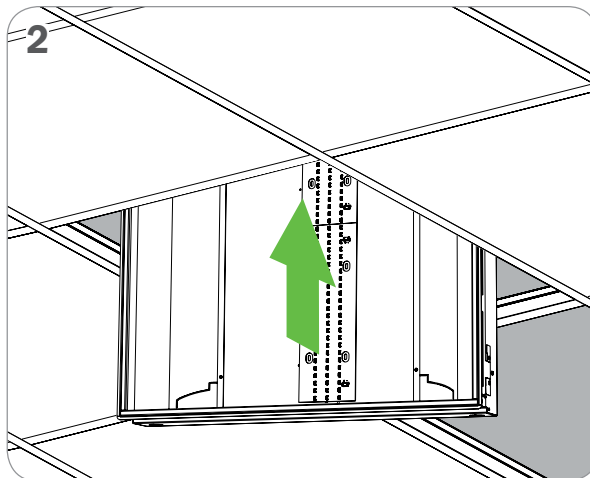

MAKE SURE NEW LENSES ARE SEATED ON THE ARCHED GROOVE INSIDE THE HOUSING. VOUS ASSUREZ QUE LES NOUVELLES LENTILLES SOIENT BIEN APPUYÉES SUR LA RAINURE CAMBRÉE À L'INTÉRIEUR DU BOÎTIER.

La conception et le développement font partie d'un processus d'évolution continu chez Éclairage Axis. Nous nous réservons le droit de changer les spécifications. Pour obtenir l'information la plus récente sur le produit, veuillez contacter Axis.

Product design and development is an ongoing process at Axis Lighting. We reserve the right to change specifications. Contact Axis for the latest product information. © 2016 Axis Lighting Inc. 1.800.263.2947 [T]514.948.6272

NOM DE FILIÈRE / FILE NAME: AURA-T-BAR.INST  
RÉVISION 001 / REVISION 001

18 / 09 / 2019




**AVERTISSEMENT :** LOCALISER TOUTS LES CIRCUITS ET CABLES. **RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.**

**WARNING :** LOCATE ALL POWER CONDUITS AND CABLES. **RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.**






## RECESSED T-BAR INSTALLATION INSTRUCTIONS FOR 1x4, 2X2, 2X4 DIRECTIVES D'INSTALLATION POUR PROFILÉ EN T ENCASTRÉ POUR 1x4, 2x2, 2x4

**NOTE:** ENSURE THAT THE POWER TO THE FIXTURE'S CIRCUIT IS TURNED OFF. / VEUILLEZ VOUS ASSURER QUE L'ALIMENTATION DU LUMINAIRE EST COUPÉE AU CIRCUIT.

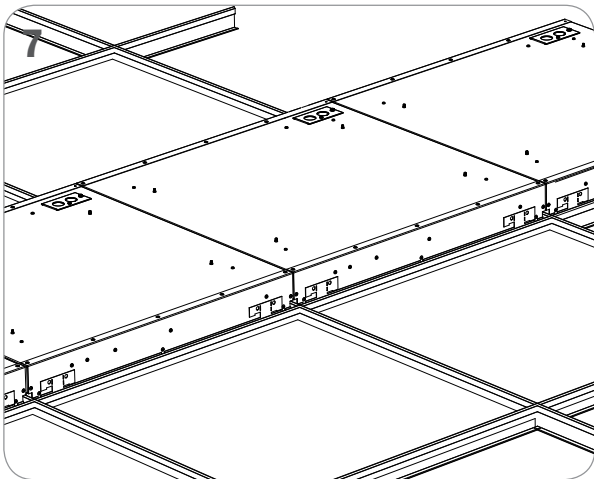

**CONTINUOUS ROW :** FOLLOW STEPS 1 TO 5 TO INSTALL NEXT FIXTURE IN CEILING , THEN :

**ENFILADE CONTINUE:** RÉPÉTER LES ÉTAPES 1 À 5 POUR LES AUTRES LUMINAIRES DE L'ENFILADE

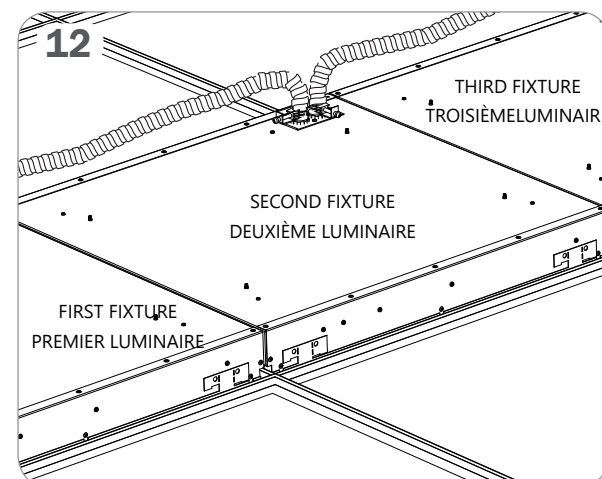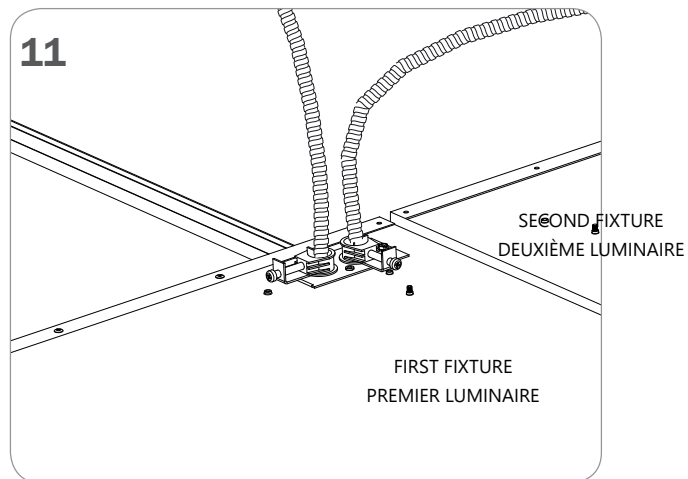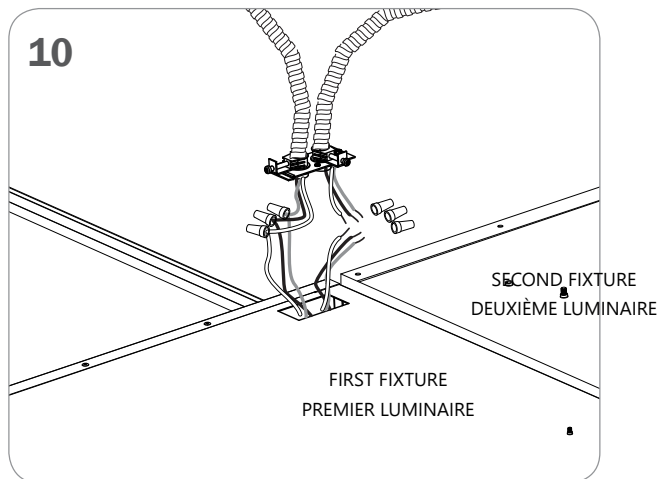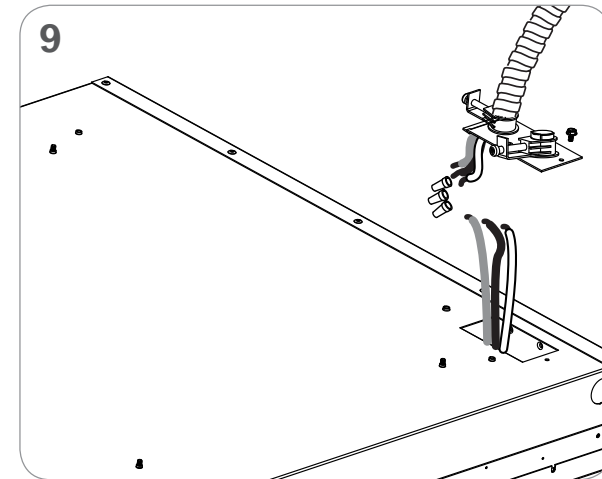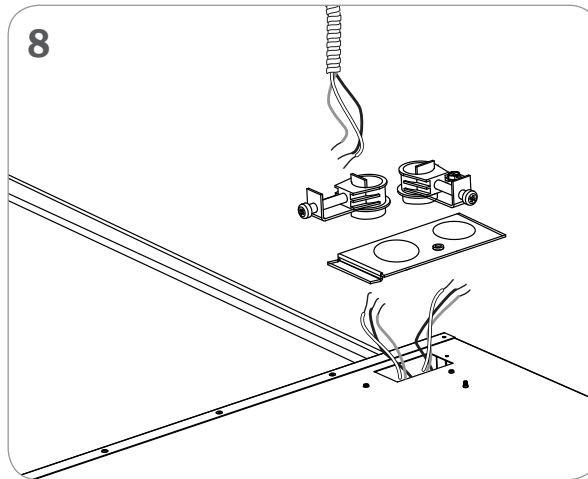

La conception et le développement font partie d'un processus d'évolution continu chez Éclairage Axis. Nous nous réservons le droit de changer les spécifications. Pour obtenir l'information la plus récente sur le produit, veuillez contacter Axis.

Product design and development is an ongoing process at Axis Lighting. We reserve the right to change specifications. Contact Axis for the latest product information. © 2016 Axis Lighting Inc. 1.800.263.2947 [T]514.948.6272

NOM DE FILIÈRE / FILE NAME: AURA.T-BAR.INST  
RÉVISION 001 / REVISION 001



18 / 09 / 2019




**AVERTISSEMENT :** LOCALISER TOUS LES CIRCUITS ET CABLES. **RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.**

**WARNING :** LOCATE ALL POWER CONDUITS AND CABLES. **RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.**

**NOTE:** ENSURE THAT THE POWER TO THE FIXTURE'S CIRCUIT IS TURNED OFF. / VEUILLEZ VOUS ASSURER QUE L'ALIMENTATION DU LUMINAIRE EST COUPÉE AU CIRCUIT.

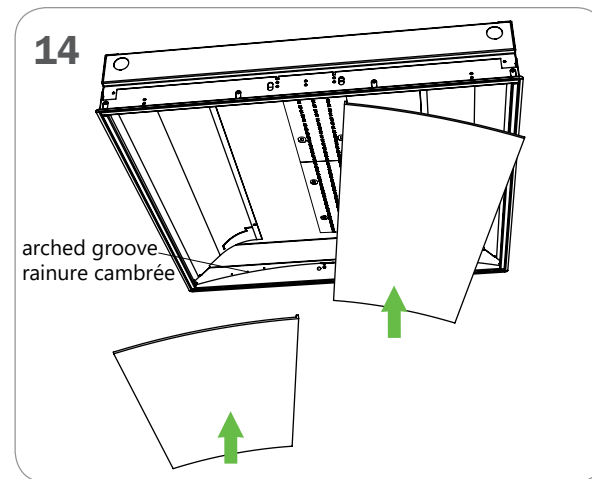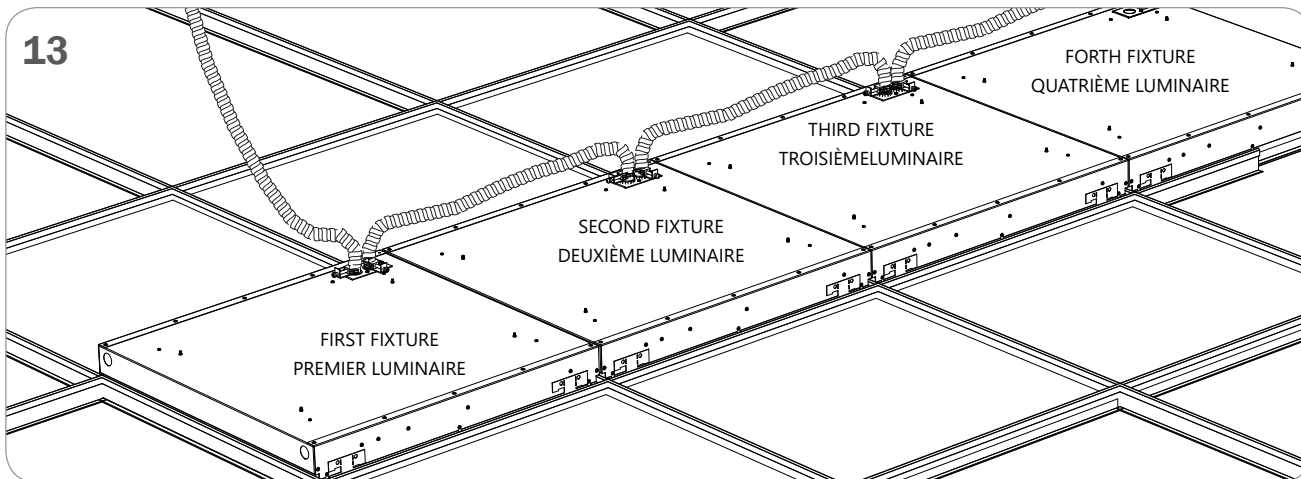

MAKE SURE NEW LENSES ARE SEATED ON THE ARCHED GROOVE INSIDE THE HOUSING.  
VOUS ASSUREZ QUE LES NOUVELLES LENTILLES SOIENT BIEN APPUYÉES SUR LA RAINURE CAMBRÉE À L'INTÉRIEUR DU BOÎTIER.

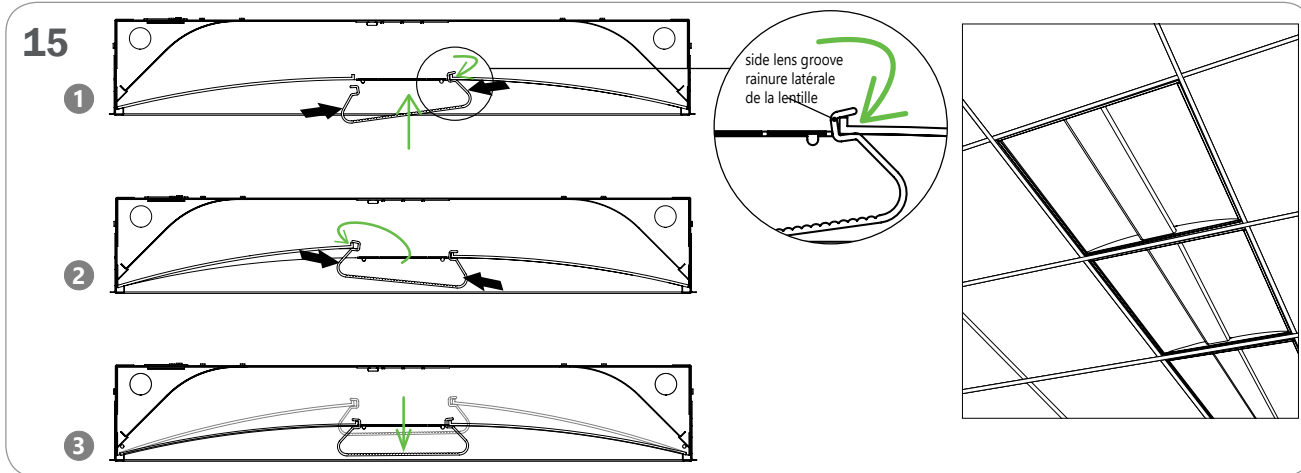

- 1) HOOK CENTER LENS SIDE ON RIGHT LENS GROOVE.
- 2) PUSH AND ROTATE UPWARD UNTIL SECOND SIDE OF CENTER LENS FALLS ON THE LEFT LENS GROOVE.
- 3) TURN CENTER LENS LEVEL AND PULL DOWN.
- 1) ACCROCHER LE CÔTÉ DE LA LENTILLE CENTRALE SUR LA RAINURE DROITE DE LENTILLE
- 2) POUSSER ET FAIRE PIVOTER VERS LE HAUT JUSQU'À CE QUE LE DEUXIÈME CÔTÉ DE LA LENTILLE CENTRALE S'ENCLENCHE DANS LA RAINURE GAUCHE DE LENTILLE.
- 3) TOURNER LE NIVEAU DE LA LENTILLE CENTRALE ET TIRER VERS LE BAS.

La conception et le développement font partie d'un processus d'évolution continu chez Éclairage Axis. Nous nous réservons le droit de changer les spécifications. Pour obtenir l'information la plus récente sur le produit, veuillez contacter Axis.

Product design and development is an ongoing process at Axis Lighting. We reserve the right to change specifications. Contact Axis for the latest product information. © 2016 Axis Lighting Inc. 1.800.263.2947 [T]514.948.6272



**AVERTISSEMENT :** LOCALISER TOUS LES CIRCUITS ET CABLES. **RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.**

**WARNING :** LOCATE ALL POWER CONDUITS AND CABLES. **RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.**