




Stencil® Pendant | PENDANT - LINEAR DIRECT / INDIRECT



Micro lens shown



Micro Louver grey shown



See page 3 for Accent section view

Project _____

Type _____

Notes _____

PRODUCT DIRECTORY

NOTE: For Hub End Caps, In-line hubs, Blank, Indirect or Accent segments please refer to the product directory code directory below.

PRODUCT ID	END CAPS		DISTRIBUTIONS								JOINING	
	HUB	FLAT	FLUSH	MICRO LOUVER	INDIRECT SURROUND LITE	INDIRECT/ INDIRECT ASYM.	MIKROLITE	ACCENTS	NO DIRECT	NO INDIRECT	IN-LINE HUB	CONTINUOUS RUN
STD ⁽¹⁾		✓	✓	✓								✓
STI ⁽²⁾		✓			✓	✓		✓				✓
STCO ⁽³⁾	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	
STFC ⁽⁴⁾	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	
STLDI ⁽⁵⁾	✓		✓	✓	✓	✓		✓	✓	✓		✓
STFDI ⁽⁶⁾	✓		✓	✓	✓	✓		✓	✓	✓	✓	

⁽¹⁾ Stencil Pendant Direct LED Linear.

⁽²⁾ Stencil Pendant Indirect/ Indirect Asymmetric LED Linear.

⁽³⁾ Stencil Pendant LED Combined Distribution Linear.

⁽⁴⁾ Stencil Pendant Combined Forms.

⁽⁵⁾ Stencil Pendant Surroundlite Linear Direct / Indirect.

⁽⁶⁾ Stencil Pendant Surroundlite Forms Direct / Indirect.

Ordering Guide

STLDI												
PRODUCT ID		TOTAL LENGTH (FT)		SHIELDING UP		NOM. LUMENS/FT UP		SHIELDING DOWN		NOM. LUMENS/FT DOWN		
STLDI	Stencil Pendant	2	2'	SLI	SurroundLite indirect	175	175 lm/ft	DSO	direct spotless lens	200	200 lm/ft	SO lens option only
	SurroundLite Linear	3	3'	SLIA	SurroundLite indirect asy.	250	250 lm/ft	DMLBK	direct micro louver black*	300	300 lm/ft	
	direct indirect	4	4'			350	350 lm/ft	DMLG	direct micro louver grey*	400	400 lm/ft	
		5	5'			500	500 lm/ft			150	150 lm/ft	Micro louver option only
		6	6'			700	700 lm/ft			225	225 lm/ft	
		7	7'			1000	1000 lm/ft			300	300 lm/ft	
		8	8'							450	450 lm/ft	
		S(L)	System Run								600	600 lm/ft
		Lit segments are available in 1' increments. Segment length from 2' to 8' continuous.						* Micro louver recommended at outputs over 500 lm/ft.				

CRI	COLOR TEMP.	FINISH	VOLTAGE	REMOTE DRIVER
80 80 CRI	27 2700 K *	AP aluminum paint	120 120 V	DP dimming (0-10V) 1% - remote only
90 90 CRI	30 3000 K	W white	277 277 V	LT lutron - remote only
	35 3500 K	BLK black	347 347 V*	BI bi-level dimming - remote only
	40 4000 K	C custom	UNV universal	O other - remote only **
			DC low voltage**	POE(#) POE drivers***
Applies to both Up and Down		* Consult factory ** Only available with POE drivers		All the drivers are remote only; Applies to both UP & DOWN. *Specify system ** Please consult factory; see page 3 *** Specify system

CIRCUITS	MOUNTING/SUSPENSION	CANOPY	BATTERY - REMOTE (OPT.)	CUSTOM (OPT.)
1 1 circuit 2 2 circuits +E(#) emergency circuit *	CA(#) drywall+cable length (36" std.) CT9(#) TB/TG 9/16+cable length (36" std.) CT15(#) TB/TG15/16+cable length (36" std.) CTS(#) screw slot+cable length (36" std.) CASL(#) drywall cable sloped ceiling	SC square canopy RC round canopy	BR(#) remote battery pack	C custom
* Specify quantity	See Mounting kit guide for full specification code. Specify length	White canopy standard	Remote only	Please specify

Ordering Guide -Accent (Optional) * For Accent only, specify the total blank length. Specify NO for total direct & indirect length.

AC (#, Option, Beam, Finish)			
ACCENT QUANTITY	ACCENT OPTION	BEAM	ACCENT FINISH
(#) accent quantity	R regular	AC20 20 deg AC35 35 deg	AP aluminum paint W white BLK black
500 lumens per accent with 0-10 dimming (1%) Only 1 accent per 2ft segments* For segments* over 2ft, min. spacing between accents is 4" *A segment is the linear space between 2 hubs. See page 4 for more information.	See page 4 for more information. Not available on Hub.		


Stencil® Pendant | PENDANT - LINEAR DIRECT / INDIRECT

● SEGMENT LENGTHS AND MOUNTING POINTS


Stencil lit segments are available in lengths of 2' to 8' in one foot increments. Segments exceeding 8' in length are comprised of a combination of lengths.

For more information on systems and joining, please refer to the Stencil installation sheets available for download at www.axislighting.com.

Feet	Segment length X1		Mounting points X2	
	Inches	mm	Inches	mm
2	22.250	565	24.000	610
3	35.125	892	36.875	937
4	46.250	1175	48.000	1219
5	57.375	1457	59.125	1502
6	70.250	1784	72.000	1829
7	81.375	2067	83.125	2111
8	94.250	2394	96.000	2438

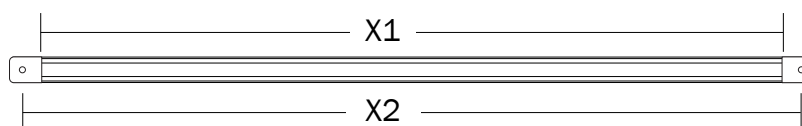

X1 - Segment length
X2 - Mounting points



i Segment length from 2' to 8' continuous.
Lengths above 8' will require Inline Hub.
Available in 1' increments.

● LED SYSTEM

CRI	Minimum 80 or 90 color rendering index
CCT	Choice of 2700K, 3000K, 3500K and 4000K color temperature with a great color consistency (within 3.0-step MacAdam ellipse).
LED life	Minimum 50,000h with 85% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements.
Thermal Management	Aluminum housing acting as the heat sink to maximize life.
Performance	Up to 101 lm/W.

● CONSTRUCTION

Housing	Extruded Aluminum (0.080" nominal) up to
End Cap+ Joiner	Die Cast Aluminum
Interior Brackets	Die Formed Sheet Steel (20 gauge)
Reflectors	High reflectivity white polycarbonate
Lenses	Extruded Acrylic
Hanger	Die Cast Aluminum
Suspension	1mm Aircraft Cable along product length
Cable Grips	Quick Connecting / Release

● ELECTRICAL - (ALL DRIVERS ARE REMOTE)

Standard Driver	DP dimming (0-10V) 1%
Lutron driver	LDE1 - EcoSystem H-Series (1%)
Other drivers	DALI - Digital Addressable Lighting Interface DMX - Digital Multiplex Xitanium SR - For wireless sensor POE (Power over Ethernet) - Low Voltage Lighting System

Power over Ethernet MOLEX
POE drivers* IGOR
(consult factory for SMARTENGINE
more information) O - Other (Consult factory)
UL2108 certified for
integral or remote driver

All drivers are remote

Emergency	Remote emergency battery pack or emergency circuit optional.
Input Voltage	120V, 277V, 347V, UNV.

i Incorporating these components may have limitations or effect the length of the luminaire, please contact factory for more details.

● WARRANTY

Limited 5-year warranty is available. Warranty is valid provided luminaires are installed and used according to specifications. For full terms and conditions, please consult warranty section at axislighting.com.

● FINISH

Aluminum paint, powder coated and custom finishes are also available.


● APPROVALS

Certified to UL and CSA standards.  Suitable for damp locations.


● LIGHT GUIDE

High precision light guide made of PMMA material, allows distribution of controlled light in all 3-dimensions to put light on both vertical and horizontal planes within the space. Patented lightguide design featuring molecular optics and precision-coupled optic components yield a high efficiency luminaire. In-plane mixing maximizes color uniformity while light emitting area is uniform and diffuse without 'head lighting' from the LED's.

● ACCENT BEAM SPREADS



● STENCIL WITH ACCENT SECTION VIEW

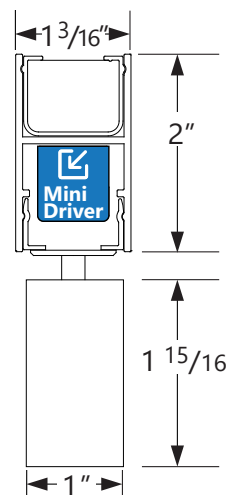

ACCENT EFFICACY

3 Accents / Driver	120V, 21W, 0.18A; 277V, 21.5W, 0.10A.
1 Accent / Driver	120V, 8W, 0.12A; 277V, 8.4W, 0.06A.

NOTE: Configuration of multiple accents with different drivers will change efficacy values.



● ACCENT OPTIONS



Regular shown

Accent positioning options.




Accent on segment

● PHOTOMETRIC DATA

Uplight
175 lm/ft
Downlight with direct spotless lens (DSO)
200 lm/ft

PHOTOMETRIC CURVE

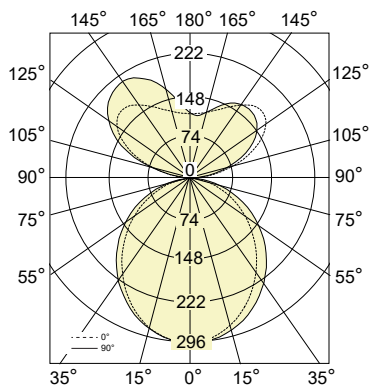

Lumen/ft up: 175 lm/ft
Lumen/ft down: 200 lm/ft
Total Lumens: 1463 lm (for 4ft)
Input Watts: 18.2 W
Efficacy: 88 lm/W

CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angles				
	0	22.5	45	67.5	90
0	296	296	296	296	296
5	292	292	293	294	294
15	273	274	277	281	282
25	242	244	250	256	259
35	203	206	215	224	228
45	161	165	176	186	190
55	118	122	133	143	148
65	75	79	89	98	102
75	35	38	45	52	55
85	5	6	8	11	12
90	0	0	0	0	0
95	14	11	8	7	7
105	69	56	50	55	59
115	125	102	94	102	109
125	163	135	125	135	143
135	175	149	143	152	160
145	161	144	146	155	161
155	139	130	134	143	148
165	124	117	118	122	125
175	117	114	113	113	113
180	116	116	116	116	116

ZONAL LUMENS

Zone	Lumens
0	
0-10	28
10-20	79
20-30	116
30-40	136
40-50	137
50-60	120
60-70	89
70-80	48
80-90	11
90-100	15
100-110	66
110-120	114
120-130	138
130-140	134
140-150	109
150-160	73
160-170	38
170-180	11
180	

LUMINANCE DATA (cd/m²)

Vertical Angle	Horizontal Angles		
	0	45	90
45	3793	4142	4479
55	3424	3872	4296
65	2968	3493	4033
75	2279	2864	3508
85	1032	1587	2332

80 CRI shown. For 90 CRI, divide wattage by 0.8 and multiply efficacy by 0.8.


IES FILE: STLDI-I-175-DSO-200-4-80-35.IES

TESTED ACCORDING TO IES LM-79-2008

i All IES files are available for download at: www.axislighting.com

Uplight
250 lm/ft
Downlight with direct spotless lens (DSO)
300 lm/ft

PHOTOMETRIC CURVE

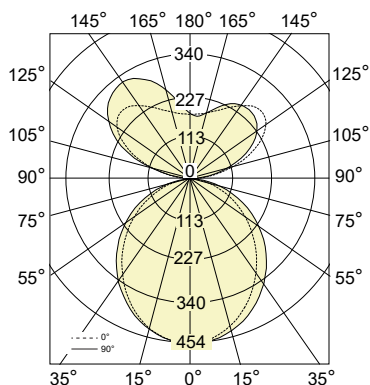

Lumen/ft up: 250 lm/ft
Lumen/ft down: 300 lm/ft
Total Lumens: 2161 lm (for 4ft)
Input Watts: 25.2 W
Efficacy: 86 lm/W

CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angles				
	0	22.5	45	67.5	90
0	453	453	453	453	453
5	448	448	449	450	451
15	419	420	425	430	432
25	371	374	384	393	397
35	311	316	330	344	349
45	247	253	270	285	292
55	181	187	205	221	228
65	115	121	136	151	157
75	54	58	68	79	84
85	8	10	13	17	19
90	0	0	0	1	0
95	19	15	11	9	9
105	95	77	69	75	81
115	172	141	129	140	149
125	224	185	172	186	197
135	240	204	196	209	220
145	221	198	201	213	221
155	191	178	184	196	203
165	170	161	162	168	172
175	160	156	155	155	155
180	159	159	159	159	159

ZONAL LUMENS

Zone	Lumens
0	
0-10	43
10-20	121
20-30	180
30-40	211
40-50	214
50-60	190
60-70	142
70-80	80
80-90	21
90-100	21
100-110	91
110-120	157
120-130	189
130-140	185
140-150	150
150-160	100
160-170	53
170-180	16
180	

LUMINANCE DATA (cd/m²)

Vertical Angle	Horizontal Angles		
	0	45	90
45	5808	6360	6884
55	5246	5949	6608
65	4547	5375	6194
75	3479	4407	5421
85	1540	2431	3604

80 CRI shown. For 90 CRI, divide wattage by 0.8 and multiply efficacy by 0.8.

IES FILE: STLDI-I-250-DSO-300-4-80-35.IES


TESTED ACCORDING TO IES LM-79-2008

i All IES files are available for download at: www.axislighting.com

● PHOTOMETRIC DATA

Uplight
350 lm/ft
Downlight with direct spotless lens (DSO)
200 lm/ft

PHOTOMETRIC CURVE

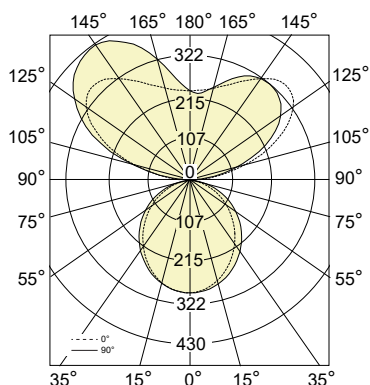

Lumen/ft up: 350 lm/ft
Lumen/ft down: 200 lm/ft
Total Lumens: 2163 lm (for 4ft)
Input Watts: 25.4 W
Efficacy: 85 lm/W

CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angles				
	0	22.5	45	67.5	90
0	296	296	296	296	296
5	292	292	293	294	294
15	273	274	277	281	282
25	242	244	250	256	259
35	203	206	215	224	228
45	161	165	176	186	190
55	118	122	133	143	148
65	75	79	89	98	102
75	35	38	45	52	55
85	5	6	8	11	12
90	0	0	0	0	0
95	28	22	17	14	13
105	139	112	101	110	118
115	250	205	187	203	217
125	327	269	250	271	287
135	350	298	285	304	320
145	322	288	292	310	322
155	278	259	268	285	296
165	247	235	236	244	251
175	234	228	226	225	226
180	232	232	232	232	232

ZONAL LUMENS

Zone	Lumens
0	
0-10	28
10-20	79
20-30	116
30-40	136
40-50	137
50-60	120
60-70	89
70-80	48
80-90	11
90-100	30
100-110	133
110-120	228
120-130	275
130-140	269
140-150	219
150-160	146
160-170	77
170-180	23
180	

LUMINANCE DATA (cd/m²)

Vertical Angle	Horizontal Angles		
	0	45	90
45	3793	4142	4479
55	3424	3872	4296
65	2968	3493	4033
75	2279	2864	3508
85	1032	1587	2332

80 CRI shown. For 90 CRI, divide wattage by 0.8 and multiply efficacy by 0.8.


IES FILE: STLDI-I-350-DSO-200-4-80-35.IES

TESTED ACCORDING TO IES LM-79-2008

i All IES files are available for download at: www.axislighting.com

Uplight
500 lm/ft
Downlight with direct spotless lens (DSO)
400 lm/ft

PHOTOMETRIC CURVE

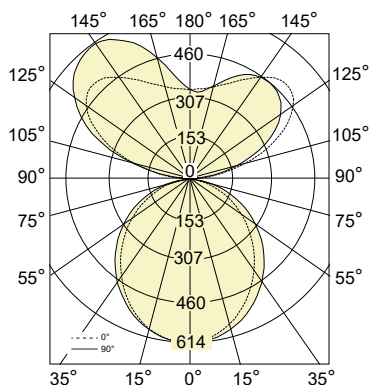

Lumen/ft up: 500 lm/ft
Lumen/ft down: 400 lm/ft
Total Lumens: 3623 lm (for 4ft)
Input Watts: 40.6 W
Efficacy: 89 lm/W

CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angles				
	0	22.5	45	67.5	90
0	613	613	613	613	613
5	605	606	607	609	610
15	566	569	575	581	585
25	502	506	519	531	537
35	421	428	447	465	473
45	333	342	365	386	395
55	244	253	277	298	308
65	156	163	184	205	213
75	73	79	93	107	114
85	11	13	17	23	26
90	0	0	0	1	0
95	40	31	24	19	19
105	198	160	144	157	168
115	357	293	268	291	311
125	467	385	357	386	410
135	499	425	407	435	457
145	460	412	418	442	459
155	397	370	384	407	422
165	353	335	337	349	358
175	334	326	323	322	323
180	331	331	331	331	331

ZONAL LUMENS

Zone	Lumens
0	
0-10	58
10-20	164
20-30	243
30-40	286
40-50	289
50-60	256
60-70	192
70-80	108
80-90	28
90-100	43
100-110	190
110-120	326
120-130	393
130-140	384
140-150	313
150-160	209
160-170	110
170-180	33
180	

LUMINANCE DATA (cd/m²)

Vertical Angle	Horizontal Angles		
	0	45	90
45	7855	8602	9311
55	7096	8045	8937
65	6150	7269	8377
75	4705	5960	7331
85	2084	3288	4874

80 CRI shown. For 90 CRI, divide wattage by 0.8 and multiply efficacy by 0.8.


IES FILE: STLDI-I-500-DSO-400-4-80-35.IES

TESTED ACCORDING TO IES LM-79-2008

i All IES files are available for download at: www.axislighting.com

● PHOTOMETRIC DATA - ACCENTS

Accent 20 degree

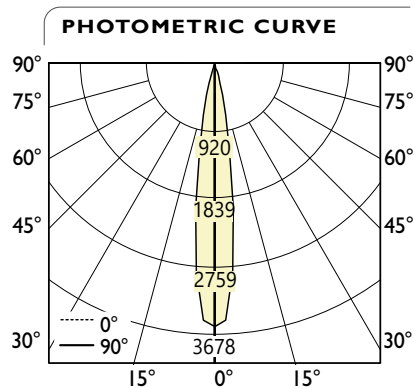

Total Lumens: 391 lm (for 1 accent)
Input Watts: 7.9 W
Efficacy: 49 lm/W

80 CRI shown. For 90 CRI, divide wattage by 0.8 and multiply efficacy by 0.8.
 IES FILE: Stencil-AC-D20(A17399G-20 DG).IES
 TESTED ACCORDING TO IES LM-79-2008


CANDELA DISTRIBUTION					
Vertical Angle	Horizontal Angles				
	0	22.5	45	67.5	90
0	3605	3605	3605	3605	3605
5	2668	2516	1376	2760	2863
15	398	366	183	405	422
25	50	48	23	57	53
35	12	11	5	12	12
45	6	6	3	6	6
55	4	4	2	4	4
65	3	3	1	3	3
75	1	1	0	1	1
85	0	0	0	0	0
90	0	0	0	0	0

ZONAL LUMENS	
Zone	Lumens
0	
0-10	211
10-20	131
20-30	29
30-40	8
40-50	4
50-60	4
60-70	3
70-80	1
80-90	0
90	

LUMINANCE DATA (cd/m²)			
Vertical Angle	Horizontal Angles		
	0	45	90
45	16184	7724	16550
55	14208	6951	14208
65	12306	6360	13742
75	5358	3013	6027
85	1986	1005	5958

i All IES files are available for download at: www.axislighting.com

Accent 35 degree

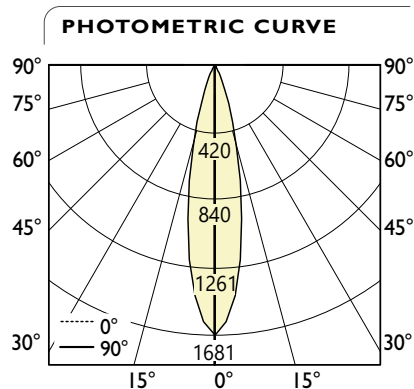

Total Lumens: 355 lm (for 1 accent)
Input Watts: 6.8 W
Efficacy: 52 lm/W

80 CRI shown. For 90 CRI, divide wattage by 0.8 and multiply efficacy by 0.8.
 IES FILE: Stencil-AC-D35(A18322G-35 DG).IES
 TESTED ACCORDING TO IES LM-79-2008

CANDELA DISTRIBUTION					
Vertical Angle	Horizontal Angles				
	0	22.5	45	67.5	90
0	1681	1681	1681	1681	1681
5	1442	1453	1453	1455	1453
15	527	518	518	512	506
25	110	109	112	108	105
35	25	25	25	25	24
45	9	9	9	9	9
55	5	5	5	5	5
65	3	3	3	3	3
75	1	1	1	1	1
85	0	0	0	0	0
90	0	0	0	0	0

ZONAL LUMENS	
Zone	Lumens
0	
0-10	123
10-20	145
20-30	55
30-40	17
40-50	7
50-60	5
60-70	3
70-80	1
80-90	0
90	

LUMINANCE DATA (cd/m²)			
Vertical Angle	Horizontal Angles		
	0	45	90
45	30812	31571	30121
55	21803	22482	21803
65	15718	15604	16184
75	4908	4908	5289
85	2236	1684	2236

i All IES files are available for download at: www.axislighting.com