




SO lens and MikroLite shown



Blank and MikroLite shown



Sculpt MikroLite Section View



MikroLite 8 cells shown (ML8)



MikroLite 2 cells shown (ML2)

Project _____

Type _____

Notes _____

PERFORMANCE PER LINEAR FOOT AT 3500K, 80 CRI

LENS	FINISH	NOMINAL LUMEN OUTPUT	INPUT WATTS*	EFFICACY
Spotless		500 lm/ft	5.5 W/ft	90 lm/W
0.5" Step Lens		500 lm/ft	4.9 W/ft	101 lm/W
2" Step Lens		500 lm/ft	4.9 W/ft	102 lm/W
Asymmetric		1000 lm/ft	10.2 W/ft	97 lm/W
MikroLite™ - 38 deg	Black	1000 lm/ft	7.8 W/ft	123 lm/W
MikroLite™ - 55 deg	Black	1000 lm/ft	9.1 W/ft	107 lm/W
MikroLite™ - 60 deg	Black	800 lm/ft	7.9 W/ft	99 lm/W
MikroLite™ - 38 deg	Gray	1000 lm/ft	7.6 W/ft	126 lm/W
MikroLite™ - 55 deg	Gray	1000 lm/ft	8.8 W/ft	111 lm/W
MikroLite™ - 60 deg	Gray	900 lm/ft	7.9 W/ft	112 lm/W
MikroLite™ - 38 deg	White	1000 lm/ft	7.7 W/ft	125 lm/W
MikroLite™ - 55 deg	White	1000 lm/ft	8.4 W/ft	117 lm/W
MikroLite™ - 60 deg	White	1000 lm/ft	8.1 W/ft	123 lm/W

* Please consult factory for custom lumen output and wattage.



Ordering Guide

A CONFIGURATION DRAWING IS REQUIRED. Factory is available for assistance. See page 2 for example of how to specify.

SCRML	PRODUCT ID	TOTAL LENGTH	OPTIC DOWN (OPT.)	NOM. LUMENS/FT DOWN - (OPT.)	Blank - Sculpt (OPT.)
SCRML	Sculpt Recessed MikroLite	# 2 ft - 12 ft continuous length (3" nominal increments) S(L) System Run	SOD spotless lens down 0.5M 0.5" StepLens, lum. end cap 0.5P 0.5" StepLens, opaque end cap 2M 2" StepLens, lum. end cap 2P 2" StepLens, opaque end cap ASO asymmetric flush lens UB ultra blend lens* NO no lens	300 300 lm/ft - Minimum 500 500 lm/ft - Maximum	BL BL(#)
		SCULPT accommodates any length. Metric lengths also available, please consult factory.	* Default lens for Tunable white		Minimum is 6"

Sculpt - MikroLite MODULE & QTY(#)	NOM. LUMENS/FT - MikroLite	MikroLite BEAM SPREAD	MikroLite CELL FINISH
+ML2(#) 2 cell (3") +ML8(#) 8 cell (1")	300 300 lm/ft - Minimum 1000 1000 lm/ft - Maximum	D38 38 deg D55 55 deg (standard)* D60 60 deg	GR grey W white BLK black
MikroLite 2 cells: minimum is ML2(#2)	Outputs between listed min and max are available. Consult factory for outputs outside of the listed range.	*Tunable white is only available in 55 degree option.	
A CONFIGURATION DRAWING IS REQUIRED			


CRI	COLOR TEMP. (choose one)	FINISH	VOLTAGE	DRIVER	CIRCUITS
80 80 CRI	27 2700 K	AP aluminum paint	120 120 V	DP dimming (0-10V) 1%	1 1 circuit
90 90 CRI	30 3000 K	W white	277 277 V	LT lutron	2 2 circuits
	35 3500 K	BLK black	347 347 V	BI bi-level dimming	+E(#) emergency section*
	40 4000 K	C custom	UNV universal	O(#) other**	+NL(#) night light section*
			DC low voltage*	TW(#) tunable white drivers*	+GTD(#) generator transfer device*
				POE(#) POE drivers*	
Applies for all optics.	*Tunable white is only available in 55 degree option. Consult Axitune technical sheet for more information of color technology		* Only available with POE drivers.	*See page 3 to specify system **Please consult factory; see page 3	Minimum 3 ft length. *Specify quantity

MOUNTING	BATTERY (OPT.)	OTHER (OPT.)	IC CONTROLS (OPT.)	CUSTOM (OPT.)
MFTB9 MiniFlange t-bar 9/16"	B(#) battery pack	CP Chicago plenum	DS(#) daylight sensor*	C custom
MFTB15 MiniFlange t-bar 15/16"		FW flex whip (6' std)*	OS(#) occupancy sensor*	
MFST MiniFlange screw slot t-bar			DOS(#) daylight & occupancy sensor*	
MFTG15 MiniFlange 9/16" t-regular			EN(#) Enlighted integral*	
MFTG15 MiniFlange 15/16" t-regular			ENR(#) Enlighted remote*	
TB9 t-bar 9/16"			WC(#) wireless control dimming	
TB15 t-bar 15/16"				
	5' minimum. For lengths under 5' - battery pack is remote only. Not available with 347V. Please consult factory	* Other lengths available; please consult factory.	*Please consult factory. Specify quantity. Requires 7" blank. See integrated controls guide for more details. Consult factory for Tunable White.	Please specify

How to Specify Combined Distributions

Example for Optic down and MikroLite™

Bottom view shown

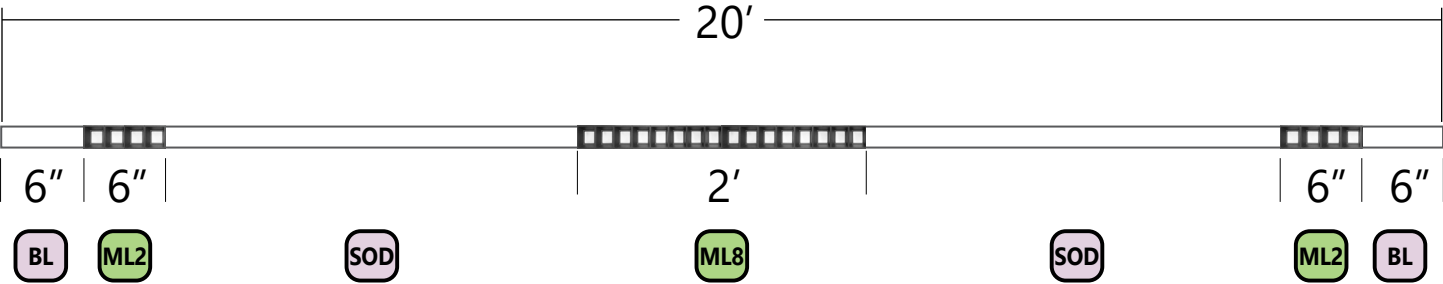

1. Provide a configuration drawing

2. Specify Total Length

20
TOTAL LENGTH

3. Specify Optic - Down

SOD
OPTIC - DOWN

4. Specify BLANK (OPTIONAL)

BL(12)
Blank (OPT.)


5. Specify MikroLite MODULE QUANTITY

ML2(4)+ML8(2)
MikroLite MODULE & QTY(#)

● LED SYSTEM

LED System	Cluster of 4 LED in each MikroLite cell
LED optical System	Axis patent pending mixing chamber optic for high efficacy light control with deep square in square architectural downlight trim
CRI	Minimum 80 or 90 color rendering index
CCT	Choice of 2700K, 3000K, 3500K and 4000K color temperature with a great color consistency (within 3.0-step MacAdam ellipse).
Color Tuning	Cluster of 4 LED 2 on each diagonal for pure color mixing and no color over angle effects in the space
LED life	Minimum 50,000h with 85% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements.
Thermal Management	Aluminum housing acting as the heat sink to maximize life.


● SHIELDING - Frosted acrylic Spotless lens

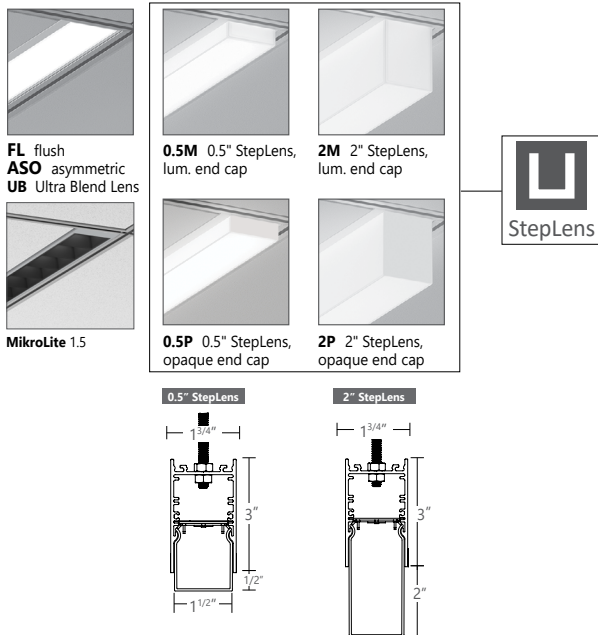

● JOINERS

In order to allow very long runs of SCULPT luminaires, Axis has developed an effective joining system. Special care has been taken to maximize the performance of the joiner for each SCULPT option.

NOTE: Mount each system segment individually. Do not assemble system prior to mounting.



i Allow a minimum of 6" between end of long runs and vertical wall

● SYSTEM (S#)

SCULPT linear systems, with the use of a strong profile, allow for a nearly hair thin connection system of continuous runs. Lengths of 4', 8', 12' as well as custom lengths are available. Runs of SCULPT that are greater than 12' in length are designated as systems (S#). This means that the run is comprised of a combination of 4', 8' and/or 12' sections to be assembled on site using our joining system. For more information on systems and joining.

● CONSTRUCTION

Housing	Extruded aluminum (0.080" nominal) up to
End Cap	Die cast aluminum
Interior Brackets	Die formed sheet steel (20 gauge)
Reflectors	White powder coated sheet steel (22 gauge)
Lenses	Extruded acrylic (0.060" nominal) - injection moulded
Hanger	Die cast aluminum
Suspension	Sliding aircraft cable along product length
Cable Grips	Quick connecting / release
MikroLite Heat Sink	Extruded aluminum

● ELECTRICAL

Lutron driver	LDE1 - Hi-lume 1% EcoSystem with Soft-on, Fade-to-Black
Other drivers**	DALI - Digital Addressable Lighting Interface DMX - Digital Multiplex Xitanium SR - For wireless sensor
Tunable White TW drivers*	DALIT6 - DALI Type 6 (Two DALI Addresses) DALIT8 - DALI Type 8 (One DALI Address)
Power over Ethernet POE drivers*	MOLEX IGOR SMARTENGINE O - Other (Consult factory)
Emergency	Integral emergency battery pack or emergency circuit optional.
Input Voltage	120V, 277V, 347V, UNV, DC.
Flex Whip	Shipped in a separate box for contractors to install

*Choose driver from available options.

i Incorporating these components may have limitations or affect the length of the luminaire. Please contact factory for more details.

● WEIGHT

Recessed 4 ft	8 lbs / 3.6 kg
Recessed 8 ft	16 lbs / 7.3 kg
Recessed 12 ft	24 lbs / 10.9 kg

● WARRANTY

Limited 5-year warranty is available. Warranty is valid provided luminaires are installed and used according to specifications. For full terms and conditions, please consult warranty section at axislighting.com.


● FINISH

Aluminum paint, powder coated and custom finishes are also available.


● APPROVALS

Certified to UL and CSA standards 
Suitable for damp locations.


● STANDARD T-BAR CEILING MOUNTING OPTIONS

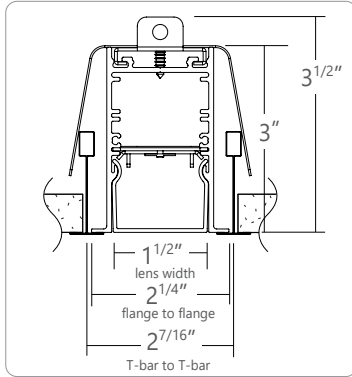


TB9 9/16" T-BAR

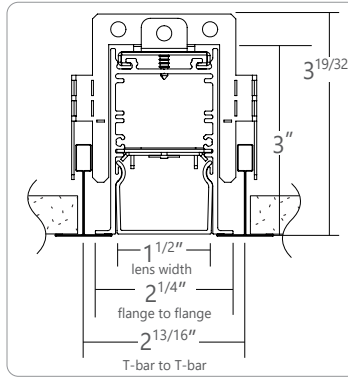


TB15 15/16" T-BAR

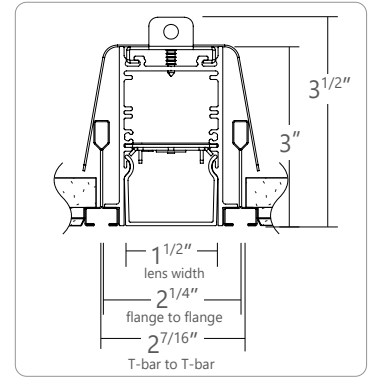

ST SCREW SLOT T-BAR

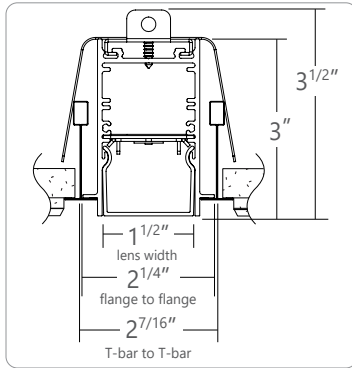


TG9 9/16" T-TEGULAR

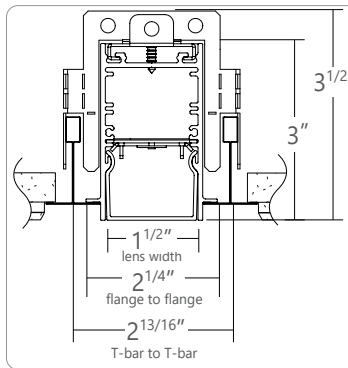


TG15 15/16" T-TEGULAR


● DRYWALL CEILING MOUNTING OPTIONS

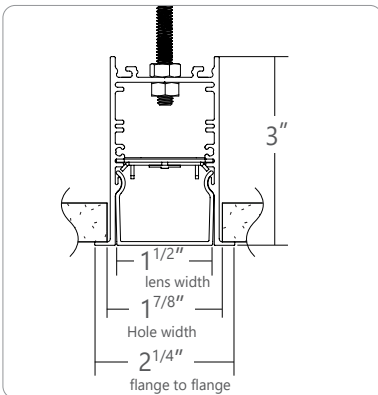


DF VISIBLE FLANGES WITH 1/4-20 STUD MOUNTING

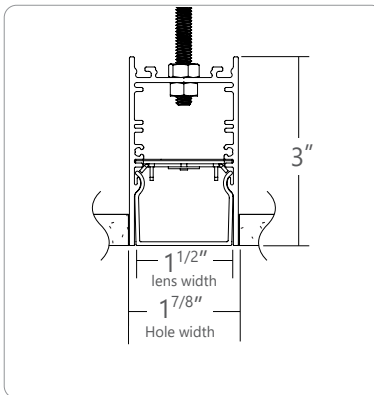

D FLANGELESS WITH 1/4-20 STUD MOUNTING

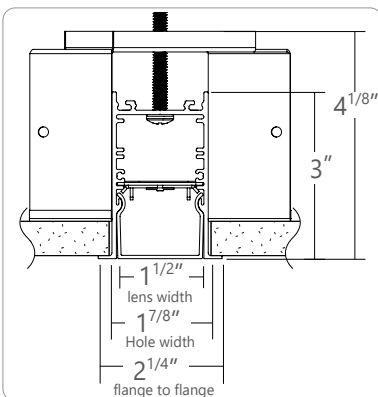


DB SLIP-THROUGH BRACKET

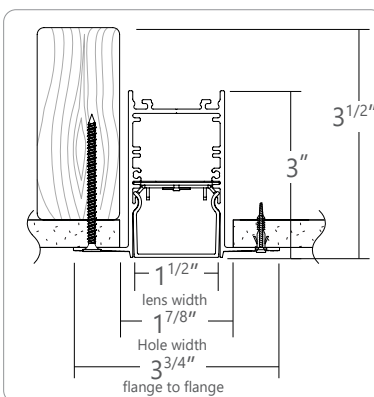


DS DRYWALL SPACKLE FLANGE


● KIT AND LINEAR - WITH INTEGRATED MINIFLANGE

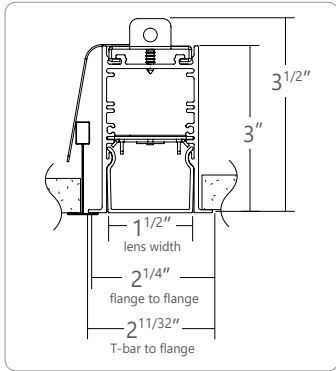


MFTB9 MiniFlange 9/16" T-BAR

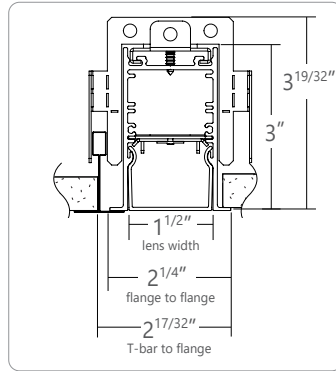


MFTB15 MiniFlange 15/16" T-BAR

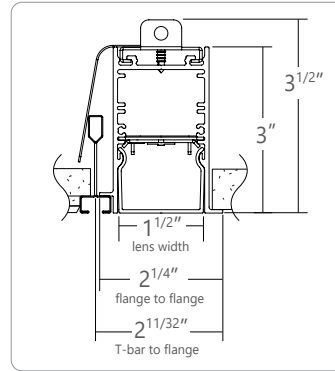


MFST MiniFlange SCREW SLOT T-BAR



MiniFlange

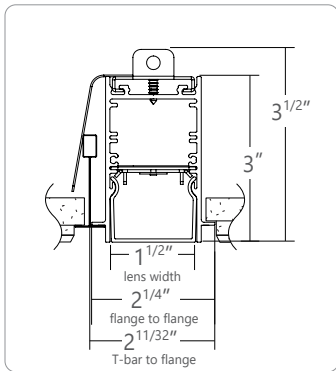


MFTG9 MiniFlange 9/16" T-TEGULAR

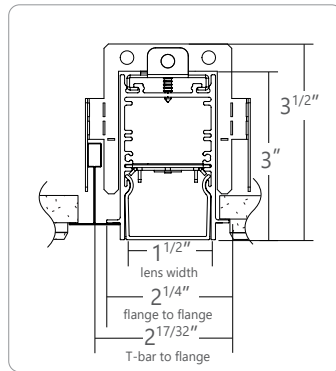

MFTG15 MiniFlange 15/16" T-TEGULAR

For 2x2 Squares only

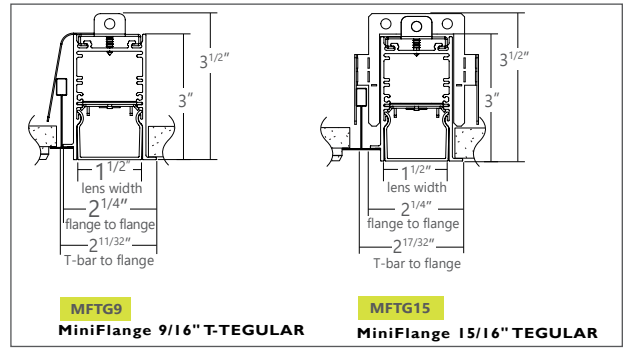

MFTG9
MiniFlange 9/16" T-TEGULAR


MFTG15
MiniFlange 15/16" T-TEGULAR

● OTHER MOUNTING OPTIONS

SCULPT is also available with surface, pendant and recessed vertical mounted options.

- i** Specification sheets and installation sheets for all mounting for SCULPT luminaires are available for download at www.axislighting.com

● BEAM SPREADS

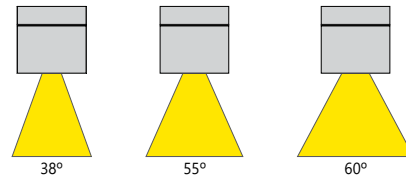


● PHOTOMETRIC DATA

500 lm/ft linear with Flush Lens



PHOTOMETRIC CURVE

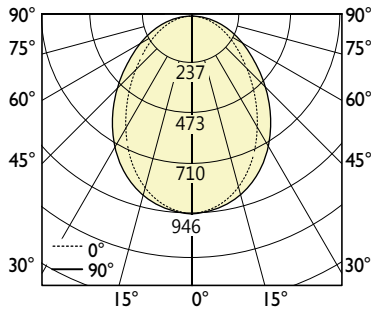

Lumen/ft down: 501 lm/ft
Total Lumens: 2004 lm (for 4ft)
Input Watts: 22.2 W
Efficacy: 90 lm/W

80 CRI shown. For 90 CRI, divide wattage by 0.8 and multiply efficacy by 0.8.
 IES FILE:SCD-500-80-35-F-4-W-UNV-D-1.IES

TESTED ACCORDING TO IES LM-79-2008

CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angles				
	0	22.5	45	67.5	90
0	943	943	943	943	943
5	932	938	934	938	940
15	884	887	872	860	859
25	788	780	750	723	715
35	656	641	599	559	544
45	508	491	446	408	392
55	361	346	310	279	266
65	227	216	193	174	167
75	110	105	96	88	86
85	21	21	23	24	23
90	0	1	3	4	4

ZONAL LUMENS

Zone	Lumens
0	
0-10	89
10-20	245
20-30	345
30-40	375
40-50	346
50-60	280
60-70	194
70-80	103
80-90	27
90	


LUMINANCE DATA (cd/m²)

Vertical Angle	Horizontal Angles		
	0	45	90
45	14871	13045	11453
55	13026	11161	9585
65	11088	9429	8163
75	8767	7698	6843
85	4868	5504	5504

500 lm/ft linear with 0.5" StepLens



PHOTOMETRIC CURVE

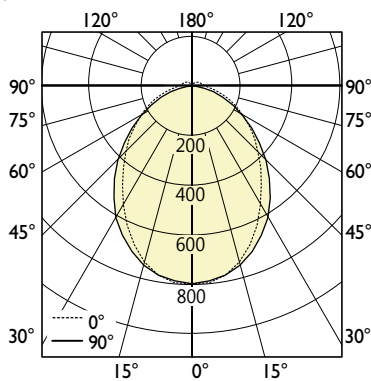

Lumen/ft down: 500 lm/ft
Total Lumens: 2000 lm (for 4ft)
Input Watts: 19.9 W
Efficacy: 101 lm/W

80 CRI shown. For 90 CRI, divide wattage by 0.8 and multiply efficacy by 0.8.
 IES FILE:SCD-500-80-35-0.5M-4-W-UNV-D-1.IES

TESTED ACCORDING TO IES LM-79-2008

CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angles				
	0	22.5	45	67.5	90
0	798	798	798	798	798
5	789	793	791	795	798
15	749	756	747	737	736
25	665	665	646	627	621
35	550	552	524	502	490
45	424	425	405	386	379
55	296	307	300	289	283
65	184	202	208	205	199
75	89	113	130	131	127
85	19	45	66	73	71
90	4	26	48	55	54
95	2	23	41	46	46
105	1	18	34	39	39
115	0	11	27	33	34
125	0	7	19	27	28
135	0	4	14	19	21
145	0	1	8	13	15
155	0	0	3	6	8
165	0	0	0	1	2
175	0	0	0	0	0
180	0	0	0	0	0

ZONAL LUMENS

Zone	Lumens
0	
0-10	75
10-20	209
20-30	297
30-40	328
40-50	313
50-60	266
60-70	201
70-80	128
80-90	66
90-100	37
100-110	29
110-120	22
120-130	15
130-140	9
140-150	5
150-160	2
160-170	0
180	

LUMINANCE DATA (cd/m²)

Vertical Angle	Horizontal Angles		
	0	45	90
45	12278	9680	8467
55	10519	8188	7087
65	8816	6881	5879
75	6869	5638	4734
85	4143	4421	3748


i All IES files are available for download at: www.axislighting.com

● PHOTOMETRIC DATA

500 lm/ft linear with 2" StepLens



PHOTOMETRIC CURVE

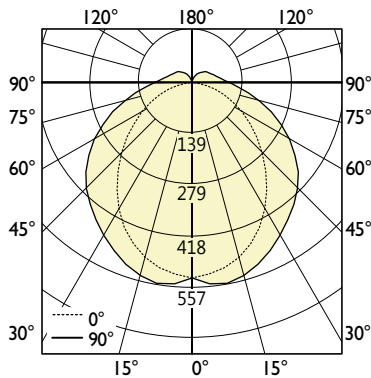

Lumen/ft down: 500 lm/ft
Total Lumens: 2002 lm (for 4ft)
Input Watts: 19.6 W
Efficacy: 102 lm/W

80 CRI shown. For 90 CRI, divide wattage by 0.8 and multiply efficacy by 0.8.

IES FILE:SCD-500-80-35-2M-4-W-UNV-D-1.IES

TESTED ACCORDING TO IES LM-79-2008

CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angles				
	0	22.5	45	67.5	90
0	534	534	534	534	534
5	526	536	542	550	553
15	496	522	535	542	547
25	437	474	492	501	507
35	358	405	433	451	459
45	273	330	373	400	409
55	194	257	311	340	346
65	125	190	246	271	270
75	66	129	183	198	193
85	22	81	127	134	129
90	10	62	105	110	104
95	8	54	91	95	89
105	6	43	71	74	69
115	3	31	57	62	59
125	2	24	44	52	51
135	1	17	34	40	42
145	1	11	23	31	33
155	0	6	13	21	23
165	0	2	6	9	12
175	0	0	1	1	1
180	0	0	0	0	0

ZONAL LUMENS

Zone	Lumens
0	
0-10	52
10-20	149
20-30	223
30-40	266
40-50	279
50-60	264
60-70	224
70-80	170
80-90	115
90-100	79
100-110	60
110-120	45
120-130	33
130-140	22
140-150	13
150-160	6
160-170	2
180	0


LUMINANCE DATA (cd/m²)

Vertical Angle	Horizontal Angles		
	0	45	90
45	7661	5574	5181
55	6600	4744	4347
65	5593	3954	3472
75	4518	3206	2617
85	3529	2531	1914

1000 lm/ft linear with ASO Lens



PHOTOMETRIC CURVE



Lumen/ft down: 1000 lm/ft
Total Lumens: 3983 lm (for 4ft)
Input Watts: 40.87 W
Efficacy: 97 lm/W

80 CRI shown. For 90 CRI, divide wattage by 0.8 and multiply efficacy by 0.8.

IES FILE: SCD-1000-80-35-ASO-4.IES

TESTED ACCORDING TO IES LM-79-2008

CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angles				
	0	22.5	45	67.5	90
0	1605	1605	1605	1605	1605
5	1597	1480	1418	1364	1357
15	1488	1236	1126	1070	1061
25	1277	1008	942	925	926
35	1007	805	785	807	828
45	728	609	626	697	743
55	502	439	473	569	621
65	320	287	318	418	452
75	164	145	166	231	244
85	31	30	38	53	55
90	2	3	4	5	5

ZONAL LUMENS

Zone	Lumens
0	
0-10	153
10-20	457
20-30	716
30-40	801
40-50	695
50-60	540
60-70	374
70-80	199
80-90	49
90	0

LUMINANCE DATA (cd/m²)


Vertical Angle	Horizontal Angles		
	0	45	90
45	21120	18134	21546
55	17933	16909	22209
65	15544	15439	21939
75	13017	13187	19318
85	7326	8974	12910

i All IES files are available for download at: www.axislighting.com

● PHOTOMETRIC DATA - DIRECT

MikroLite - 4ft - 38 deg
1000 lm/ft

PHOTOMETRIC CURVE

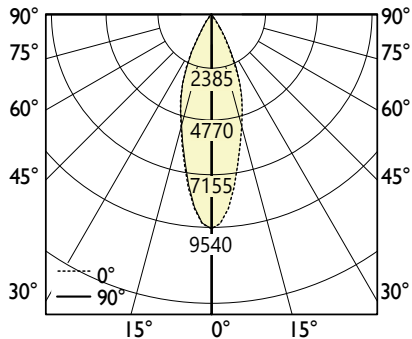

Black Finish



Direct Output: 1000 lm/ft
Total Lumens: 3840 lm (for 4ft)
Input Watts: 31.1 W
Efficacy: 123 lm/W

IES FILE: SCRMLO-4-1000-D38-BLK-80-35.IES
TESTED ACCORDING TO IES LM-79-2008

CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angles				
	0	22.5	45	67.5	90
0	9540	9540	9540	9540	9540
5	8745	8693	8748	8733	8841
15	5286	5051	4884	4964	5262
25	2781	2349	1944	2217	2641
35	394	432	741	405	357
45	50	50	82	50	49
55	16	18	20	19	17
65	1	2	3	2	1
75	0	0	0	0	0
85	0	0	0	0	0
90	0	0	0	0	0

ZONAL LUMENS


Zone	Lumens
0	
0-10	800
10-20	1474
20-30	1111
30-40	375
40-50	60
50-60	18
60-70	3
70-80	0
80-90	0
90	

LUMINANCE DATA (cd/m²)

Vertical Angle	Horizontal Angles		
	0	45	90
45	1468	2402	1432
55	598	716	600
65	73	168	50
75	0	0	0
85	29	10	1

MikroLite - 4ft - 55 deg
1000 lm/ft

PHOTOMETRIC CURVE

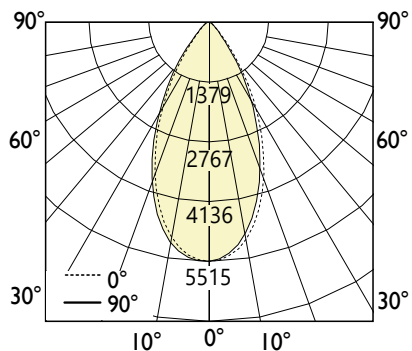

Black Finish



Direct Output: 1000 lm/ft
Total Lumens: 3912 lm (for 4ft)
Input Watts: 36.5 W
Efficacy: 107 lm/W

IES FILE: SCRMLO-4-1000-D55-BLK-80-35.IES
TESTED ACCORDING TO IES LM-79-2008

CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angles				
	0	22.5	45	67.5	90
0	5515	5515	5515	5515	5515
5	5410	5388	5419	5391	5434
15	4340	4349	4390	4338	4255
25	2625	2643	2670	2617	2583
35	1065	1138	1201	1141	1091
45	248	294	410	294	254
55	82	92	97	92	82
65	11	20	23	21	14
75	0	0	0	0	0
85	0	0	0	0	0
90	1	1	0	0	0

ZONAL LUMENS


Zone	Lumens
0	
0-10	500
10-20	1181
20-30	1177
30-40	702
40-50	251
50-60	82
60-70	19
70-80	0
80-90	0
90	

LUMINANCE DATA (cd/m²)

Vertical Angle	Horizontal Angles		
	0	45	90
45	6482	10725	6662
55	2654	3135	2659
65	484	1006	601
75	19	14	16
85	69	35	10

i All IES files are available for download at: www.axislighting.com

● PHOTOMETRIC DATA - DIRECT

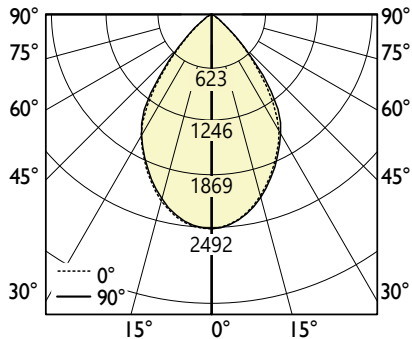MikroLite - 4ft - 60 deg
800 lm/ft**PHOTOMETRIC CURVE****CANDELA DISTRIBUTION**

Vertical Angle	Horizontal Angles				
	0	22.5	45	67.5	90
0	2492	2492	2492	2492	2492
5	2448	2443	2445	2448	2456
15	2188	2176	2184	2189	2209
25	1790	1775	1781	1785	1817
35	1244	1286	1328	1338	1348
45	482	564	787	604	537
55	96	123	170	130	105
65	9	14	19	14	9
75	1	1	1	1	1
85	1	1	1	1	1
90	2	2	2	1	1

ZONAL LUMENS

Zone	Lumens
0	
0-10	232
10-20	621
20-30	836
30-40	826
40-50	494
50-60	138
60-70	18
70-80	1
80-90	1
90	


LUMINANCE DATA (cd/m²)

Vertical Angle	Horizontal Angles		
	0	45	90
45	14199	23191	15809
55	3476	6160	3800
65	421	914	461
75	97	72	79
85	295	244	159

Black Finish

Direct Output: 800 lm/ft
Total Lumens: 3165 lm (for 4ft)
Input Watts: 31.9 W
Efficacy: 99 lm/W

IES FILE: SCRMLO-4-800-D60-BLK-80-35.IES
 TESTED ACCORDING TO IES LM-79-2008

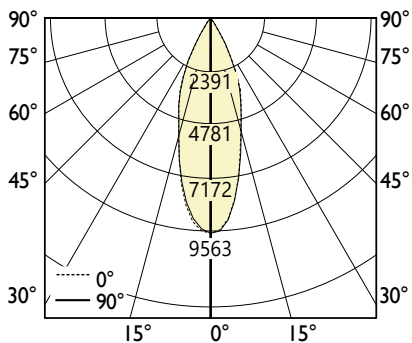MikroLite - 4ft - 38 deg
1000 lm/ft**PHOTOMETRIC CURVE****CANDELA DISTRIBUTION**

Vertical Angle	Horizontal Angles				
	0	22.5	45	67.5	90
0	9563	9563	9563	9563	9563
5	8983	8942	8984	8942	8929
15	5269	5062	4938	5015	5184
25	2704	2248	1836	2283	2710
35	385	419	726	425	377
45	56	57	93	59	56
55	24	26	28	26	24
65	8	9	10	8	7
75	4	4	4	3	3
85	1	1	1	1	1
90	1	1	0	0	0

ZONAL LUMENS

Zone	Lumens
0	
0-10	806
10-20	1468
20-30	1090
30-40	373
40-50	65
50-60	24
60-70	9
70-80	4
80-90	1
90	

LUMINANCE DATA (cd/m²)

Vertical Angle	Horizontal Angles		
	0	45	90
45	1663	2751	1657
55	876	1002	866
65	375	479	329
75	320	289	264
85	318	234	199


Gray Finish

Direct Output: 1000 lm/ft
Total Lumens: 3840 lm (for 4ft)
Input Watts: 30.5 W
Efficacy: 126 lm/W

IES FILE: SCRMLO-4-1000-D38-GR-80-35.IES
 TESTED ACCORDING TO IES LM-79-2008

i All IES files are available for download at: www.axislighting.com

● PHOTOMETRIC DATA - DIRECT

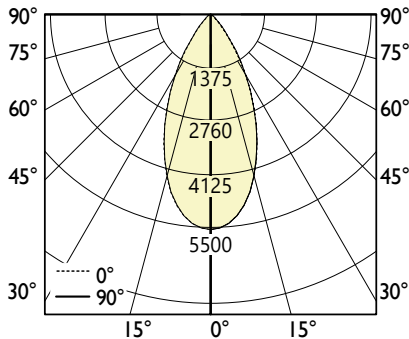MikroLite - 4ft - 55 deg
1000 lm/ft**PHOTOMETRIC CURVE****Gray Finish**

Direct Output: 1000 lm/ft
Total Lumens: 3913 lm (for 4ft)
Input Watts: 35.3 W
Efficacy: 111 lm/W

IES FILE: SCRMLO-4-1000-D55-GR-80-35.IES
 TESTED ACCORDING TO IES LM-79-2008

CANDELA DISTRIBUTION


Vertical Angle	Horizontal Angles				
	0	22.5	45	67.5	90
0	5500	5500	5500	5500	5500
5	5345	5331	5348	5339	5359
15	4205	4182	4224	4190	4214
25	2519	2503	2527	2488	2524
35	983	1041	1132	1088	1046
45	250	277	382	294	262
55	97	105	109	109	101
65	28	35	39	35	28
75	12	12	12	12	11
85	3	3	3	3	3
90	1	1	1	0	0

ZONAL LUMENS

Zone	Lumens
0	
0-10	497
10-20	1169
20-30	1156
30-40	685
40-50	254
50-60	99
60-70	37
70-80	13
80-90	4
90	

LUMINANCE DATA (cd/m²)

Vertical Angle	Horizontal Angles		
	0	45	90
45	7359	11244	7710
55	3540	3960	3682
65	1359	1932	1377
75	992	959	922
85	836	798	734

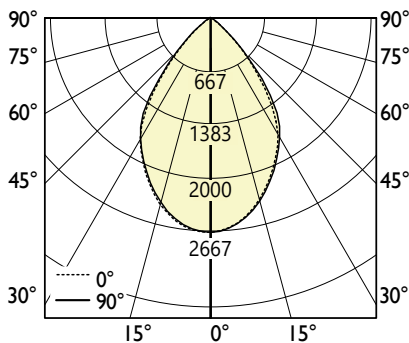MikroLite - 4ft - 60 deg
900 lm/ft**PHOTOMETRIC CURVE****Gray Finish**

Direct Output: 900 lm/ft
Total Lumens: 3563 lm (for 4ft)
Input Watts: 31.8 W
Efficacy: 112 lm/W

IES FILE: SCRMLO-4-900-D60-GR-80-35.IES
 TESTED ACCORDING TO IES LM-79-2008

CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angles				
	0	22.5	45	67.5	90
0	2662	2662	2662	2662	2662
5	2614	2603	2601	2599	2606
15	2344	2311	2303	2296	2316
25	1932	1885	1866	1865	1896
35	1363	1368	1395	1374	1350
45	572	620	800	607	541
55	155	177	200	167	140
65	54	57	60	52	45
75	30	30	27	27	26
85	9	8	7	6	6
90	2	2	2	2	2

ZONAL LUMENS


Zone	Lumens
0	
0-10	248
10-20	664
20-30	897
30-40	895
40-50	561
50-60	196
60-70	63
70-80	30
80-90	9
90	

LUMINANCE DATA (cd/m²)

Vertical Angle	Horizontal Angles		
	0	45	90
45	16854	23561	15929
55	5632	7270	5100
65	2644	2943	2241
75	2447	2190	2117
85	2094	1565	1351

i All IES files are available for download at: www.axislighting.com

● PHOTOMETRIC DATA - DIRECT

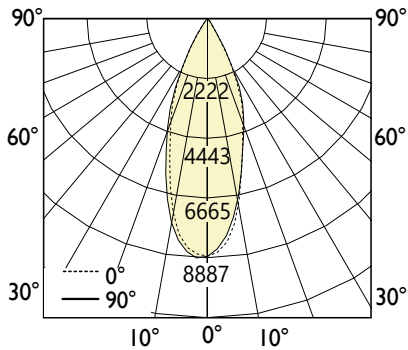**MikroLite - 4ft - 38 deg
1000 lm/ft****PHOTOMETRIC CURVE**

White Finish



Direct Output: 1000 lm/ft
Total Lumens: 3853 lm (for 4ft)
Input Watts: 30.9 W
Efficacy: 125 lm/W

IES FILE: SCRMLO-4-1000-D38-W-80-35.IES
 TESTED ACCORDING TO IES LM-79-2008

CANDELA DISTRIBUTION


Vertical Angle	Horizontal Angles				
	0	22.5	45	67.5	90
0	8821	8821	8821	8821	8821
5	8084	8052	8146	8162	8323
15	5057	4788	4540	4610	5024
25	2769	2287	1834	2150	2596
35	389	414	772	414	360
45	64	65	101	66	64
55	33	34	36	34	31
65	16	16	17	15	14
75	9	9	8	8	7
85	3	2	2	2	2
90	1	1	0	0	0

ZONAL LUMENS

Zone	Lumens
0	
0-10	762
10-20	1467
20-30	1115
30-40	378
40-50	72
50-60	32
60-70	17
70-80	9
80-90	3
90	

LUMINANCE DATA (cd/m²)

Vertical Angle	Horizontal Angles		
	0	45	90
45	1895	2963	1875
55	1186	1290	1142
65	769	829	666
75	715	637	594
85	647	501	427

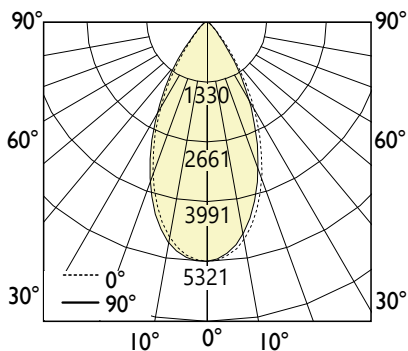**MikroLite - 4ft - 55 deg
1000 lm/ft****PHOTOMETRIC CURVE**

White Finish



Direct Output: 1000 lm/ft
Total Lumens: 3917 lm (for 4ft)
Input Watts: 33.6 W
Efficacy: 117 lm/W

IES FILE: SCRMLO-4-1000-D55-W-80-35.IES
 TESTED ACCORDING TO IES LM-79-2008

CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angles				
	0	22.5	45	67.5	90
0	5321	5321	5321	5321	5321
5	5185	5173	5185	5179	5189
15	4093	4076	4132	4093	4108
25	2444	2454	2480	2454	2481
35	962	1039	1137	1093	1043
45	273	300	395	316	284
55	124	132	135	134	126
65	53	59	62	58	52
75	28	27	26	26	26
85	8	8	7	7	7
90	2	2	1	1	1

ZONAL LUMENS

Zone	Lumens
0	
0-10	482
10-20	1135
20-30	1130
30-40	681
40-50	270
50-60	123
60-70	61
70-80	28
80-90	8
90	


LUMINANCE DATA (cd/m²)

Vertical Angle	Horizontal Angles		
	0	45	90
45	8051	11646	8376
55	4520	4903	4587
65	2635	3079	2540
75	2215	2093	2055
85	1876	1749	1703

i All IES files are available for download at: www.axislighting.com

● PHOTOMETRIC DATA - DIRECT

MikroLite - 4ft - 60 deg
1000 lm/ft

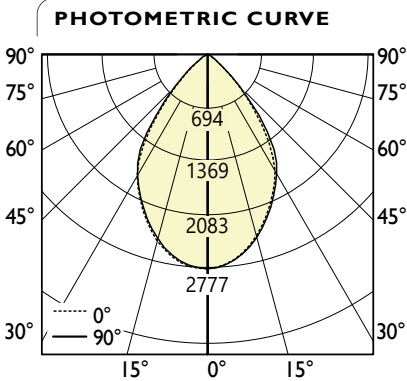

White Finish



Direct Output: 1000 lm/ft
Total Lumens: 3963 lm (for 4ft)
Input Watts: 32.2 W
Efficacy: 123 lm/W

IES FILE: SCRMLO-4-1000-D60-W-80-35.IES
TESTED ACCORDING TO IES LM-79-2008

CANDELA DISTRIBUTION					
Vertical Angle	Horizontal Angles				
	0	22.5	45	67.5	90
0	2775	2775	2775	2775	2775
5	2735	2726	2725	2719	2724
15	2470	2444	2437	2427	2443
25	2059	2017	2003	1999	2019
35	1492	1498	1521	1514	1493
45	673	730	927	727	647
55	231	254	286	241	214
65	114	117	118	110	103
75	68	66	62	61	61
85	18	16	14	13	13
90	3	3	3	2	2

ZONAL LUMENS	
Zone	Lumens
0	
0-10	258
10-20	696
20-30	948
30-40	960
40-50	631
50-60	260
60-70	121
70-80	69
80-90	19
90	

LUMINANCE DATA (cd/m²)			
Vertical Angle	Horizontal Angles		
	0	45	90
45	20155	27748	19391
55	8511	10568	7893
65	5702	5909	5164
75	5557	5050	5026
85	4450	3441	3105

i All IES files are available for download at www.axislighting.com