




Project _____

Type _____


Notes _____

IMPORTANT – all corner patterns must be submitted with drawings indicating dimensions and angles degree.

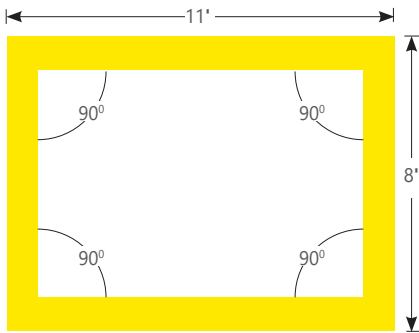


SCRPAT	REC	90+90+90+90	38'
PRODUCT ID	PATTERNS	CORNER ANGLE	LENGTH/FT

TOP VIEW - Rectangle Corner Pattern

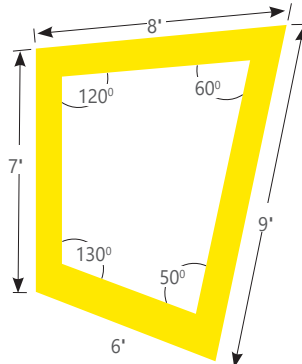

SCRPAT	ASO	120+60+50+130	30'
PRODUCT ID	PATTERNS	CORNER ANGLE	LENGTH/FT

TOP VIEW - Corner Pattern



SCRPAT	OPR	90+90	31'
PRODUCT ID	PATTERNS	CORNER ANGLE	LENGTH/FT

TOP VIEW - Open Shape Corner Pattern

Ordering Guide

SCRPAT														
PRODUCT ID		PATTERNS		CORNER ANGLE		NOM. LUMENS/FT		CRI		COLOR TEMP.		SHIELDING		
SCRPAT	Sculpt	SQ	square regular lit corners	90	90 degrees	300	300 lm/ft - Min.	80	80 CRI	27	2700 K	FL flush		
	Recessed	REC	rectangle regular lit corners	#	other angle	500	500 lm/ft - Max.	90	90 CRI	30	3000 K	0.5M 0.5" StepLens, lum. end cap		
	Patterns	ASO	other shape regular lit corners*								35	3500 K	0.5P 0.5" StepLens, opaque end cap	
		OPR	open shape regular lit corners								40	4000 K	2M 2" StepLens, lum. end cap*	
		OPO	open shape outside lit corner										2P 2" StepLens, opaque end cap*	
		OPI	open shape inside lit corner										+BL(#) Blank (for flush option only)	
		OPOI	open shape outside/inside lit corner											
		* Please consult factory for MF mounting				Please consult factory for other lumen packages						All lens options use spotless lens * Is not available with OPO, OPI and OPOI corner patterns.		

LENGTH/FT		SPECIFY LENGTH		FINISH	VOLTAGE		DRIVER		CIRCUITS	
(L)	total pattern length	NL	nominal	W white	120	120 V	DP	dimming (0-10V) 1%	1	1 circuit
		EX	exact	C custom	277	277 V	LT	lutron *	2	2 circuits
					347	347 V	BI	bi-level dimming	+E(#)	emergency section *
					UNV	universal	O	other **	+NL(#)	night light section *
					DC	low voltage*	POE(#)	POE drivers*	+GTD(#)	generator transfer device *
					* Only available with POE drivers.		* Specify system ** Please consult factory; see page 2		* Specify quantity	

MOUNTING				BATTERY (OPT.)		OTHER (OPT.)		IC CONTROL (OPTIONAL)		CUSTOM	
MFTB9	MiniFlange t-bar 9/16**	ST	screw slot t-bar	B(#)	battery pack	F	fuse *	DS(#)	daylight sensor *	C	custom
MFTB15	MiniFlange t-bar 15/16**	TG9	regular 9/16"			FW(#)	flex whip (6' std)	OS(#)	occupancy sensor *		
MFST	MiniFlange screw slot t-bar*	TG15	regular 15/16"			CP	Chicago plenum	DOS(#)	daylight & occupancy sensor *		
MFTG9	MiniFlange 9/16" t-tegular*	DF	drywall flange					EN(#)	Enlighted integral *		
MFTG15	MiniFlange 15/16" t-tegular*	D	drywall flangeless					ENR(#)	Enlighted remote **		
TB9	t-bar 9/16"	DB	slip-through bracket								
TB15	t-bar 15/16"	DS	drywall spackle flange								
* Please consult factory for ASO				Please consult factory		* Requires 120V or 277V		* For flush option only; Please consult factory ** Please consult factory For StepLens please consult factory Specify quantity. Requires 7" blank See pages 4-5 for more details		Please specify	

LIT CORNER FEATURES

The Lit Corner system allows continuous illumination all the way through the corner section



To optimize corner illumination, lit corners are created as integral components of the linear sections. Linear sections have mitered ends that connect to corresponding mitered ends of neighboring linear sections.

Illuminated Corners are more complex. Because the corner is fully illuminated, the corner is not independent of the straight sections, but integrated into the straight segment’s housing. The corner is mitered, allowing a seamless line of light.

There are three types of illuminated corner available:


1. **Regular Illuminated Corner** - This is a fully illuminated 90 degree corner that lies in the same plane, for example, the ceiling or wall.
2. **Inside Illuminated Corner.** This corner runs up the wall, then across the ceiling. (Please use the "Inside & Outside lit corner patterns spec sheet" to specify and Inside lit corner).
3. **Outside Illuminated Corner** - This corner would run across a ceiling then up a bulkhead. (Please use the "Inside & Outside lit corner patterns spec sheet" to specify and Outside lit corner).

TIP: Provide sketches illustrating corner types and locations required.

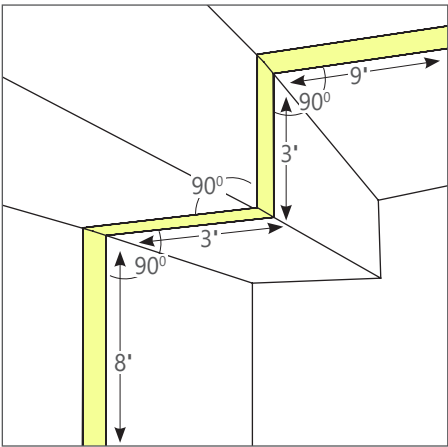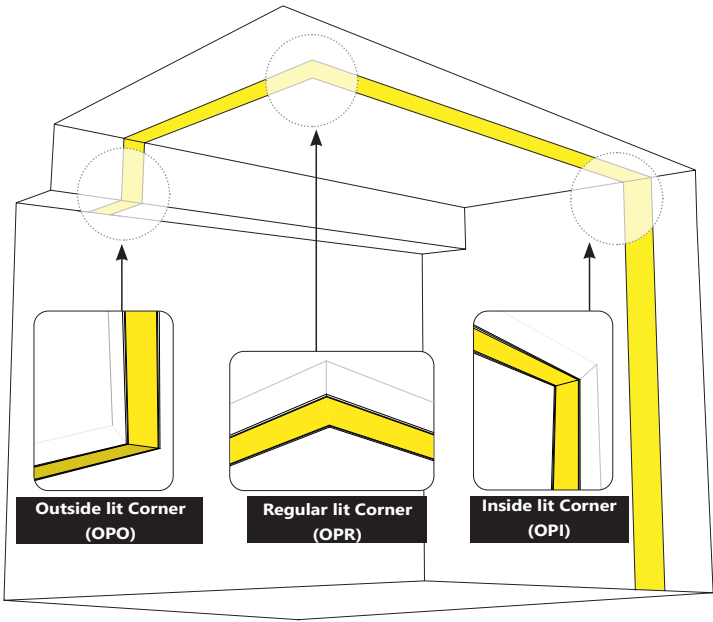


SCRPAT	OPOI	90+90+90+90	21'
PRODUCT ID	PATTERNS	CORNER ANGLE	LENGTH/FT

3D VIEW - Outside/inside 90° Corner Pattern

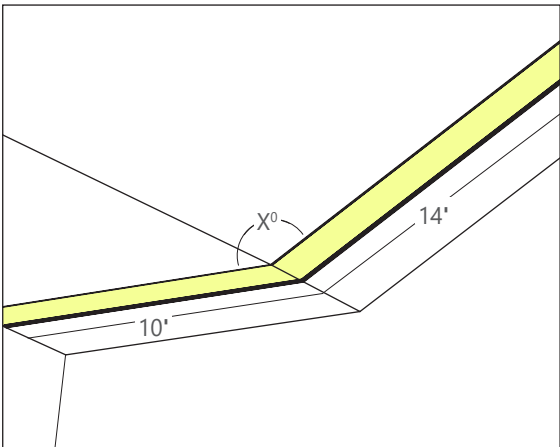

SCRPAT	OPO	X°	24'
PRODUCT ID	PATTERNS	CORNER ANGLE	LENGTH/FT

3D VIEW - Outside Corner Pattern

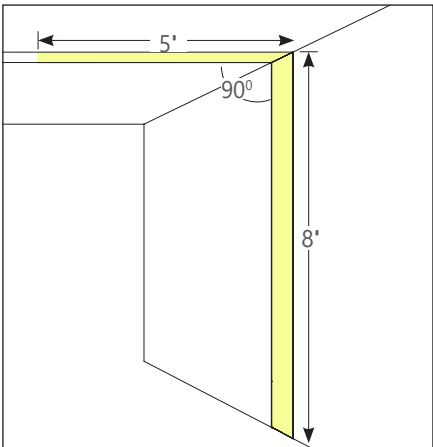

SCRPAT	OPI	90	13'
PRODUCT ID	PATTERNS	CORNER ANGLE	LENGTH/FT

3D VIEW - Inside Corner Pattern