




MINI BOX

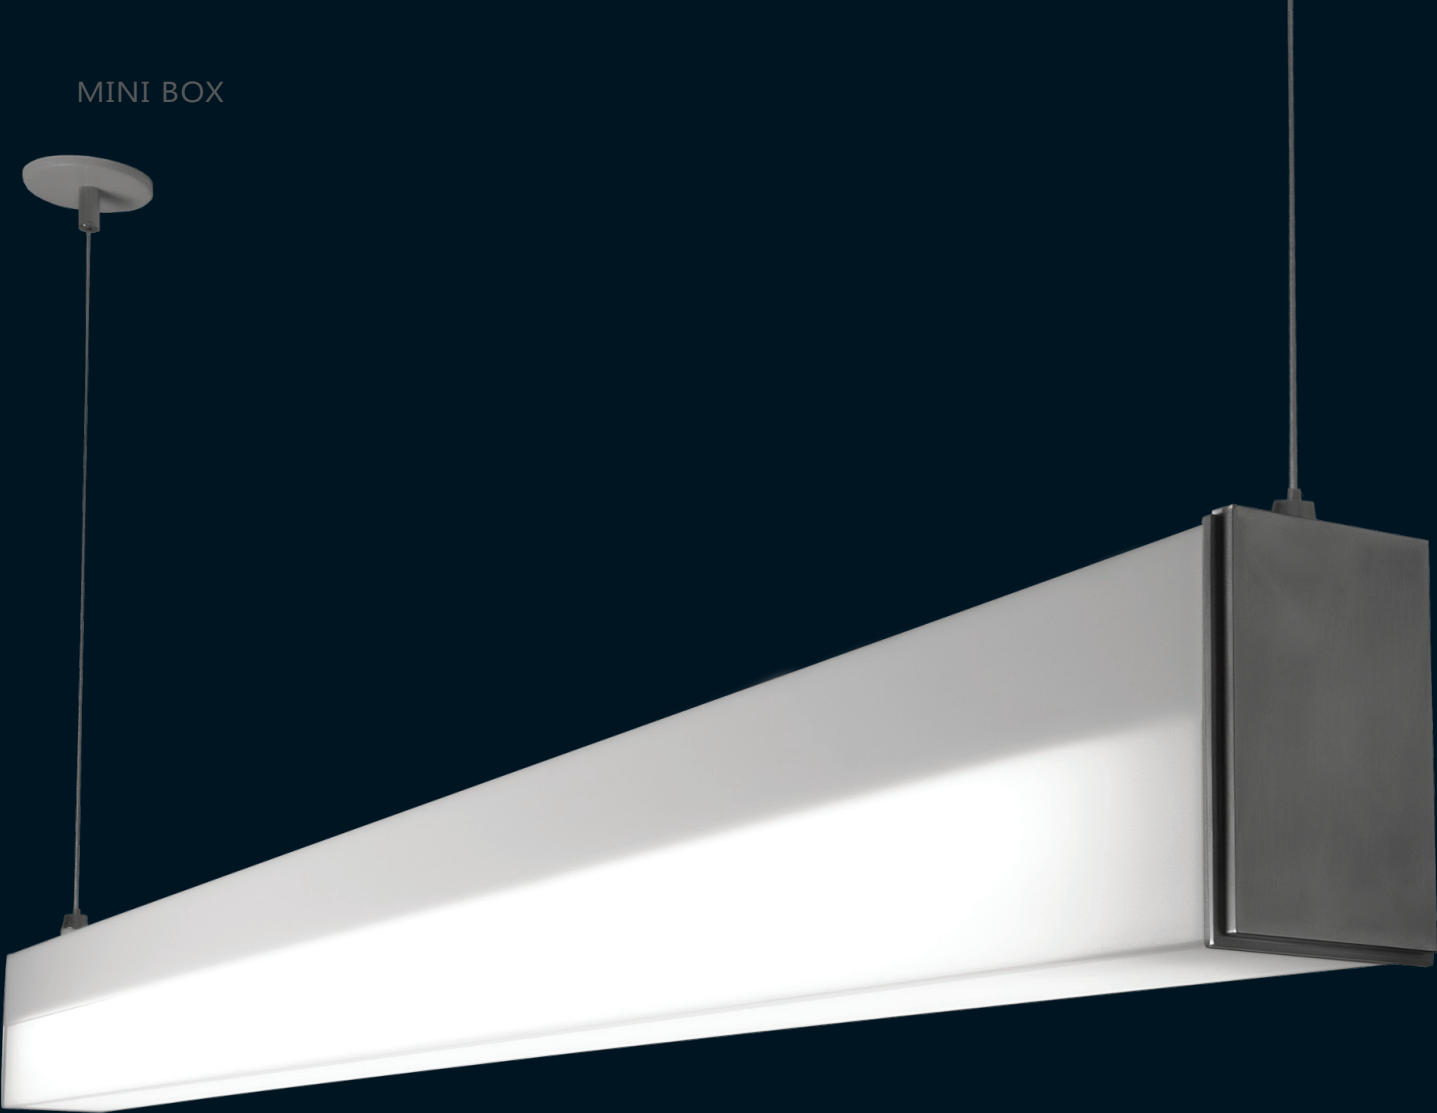


DIMENSIONS




PENDANT



SURFACE



WALL



WALL VERTICAL - TOP VIEW



Mini Box presents a clean, compact profile with high efficiency, flexible options and a choice of streamlined housing designs (3.9" x 2.4").

Constructed of extruded aluminum with die-cast end caps, Mini Box comes in a full-length rectangle end cap offering an option of clear or satin lens.

ADA-compliant, suited for use in many different applications, Mini Box can be pendant, ceiling, or wall mounted, as well as specified in continuous runs.

With efficiencies over 80% (satin lens) and over 90% (clear lens), Mini Box provides an effective means to deliver pleasing illumination with added visual interest.

MAIN PRODUCT SPECIFICATIONS

1	PRODUCT ID	2	OPTICS	3	LENGTH/FT	4	LAMP	5	LAMP CONFIGURATION	6	FINISH
MB	pendant	C	clear lens	2	2'	T5	T5	1	1 lamp	AP	aluminum paint
MBS	surface	S	satin lens	3	3'	T5HO	T5HO			C	custom
MBW	wall			4	4'					W	white
MBWV	wall vertical			6	6'						
				8	8'						
				12	12'						
				S#	System Run						



For complete luminaire specification sheets, please visit our web site at www.axislighting.com

MOUNTING OPTIONS



PENDANT



SURFACE




WALL



WALL VERTICAL

LAMP TYPE	1
T5/T5HO	☐

LIGHT DISTRIBUTION



Ballast	Electronic Rapid Start, Dimming (0-10V, Line, Step, EcoSystem, DALI). With preinstalled ballast disconnect as per NEC & CEC
Emergency	Emergency battery pack or emergency circuit
Voltage	120V, 277V, 347V, UNV.

