

Day

Combining reliability, performance, visual comfort, installation flexibility and overall cost-effectiveness, Day LED raises the bar for LED lighting in mainstream applications. Optional integral controls further enable Day LED systems to reduce energy consumption and meet increasingly stringent code requirements.


Day LED provides soft diffused brightness. With its simple lens frame, the contoured optic conceals the LED array, while lighting up evenly and ensuring consistent LED color. The luminaire features a wide range of electrical and mounting options, in addition to a 3 7/8" housing ideal for shallow plenums. Choice of curved or flat lens.

Size	Depth	Output	CRI	Color Temp.	Voltage	Finish	Driver
1'x1'	3 7/8"	900-1600 lm	80	3000K	120V	White	0-10V - 1% Standard
1'x4'		4000-7700 lm	90	3500K	277V	Custom	Lutron
2'x2'		2500-4400 lm		4000K	347V		Bi-level dimming
2'x4'		3200-9000 lm			UNV		Other

Consult spec sheet for exact output & specifications.
Surface versions also available.



1' x 1' 2' x 2' 1' x 4' 2' x 4'

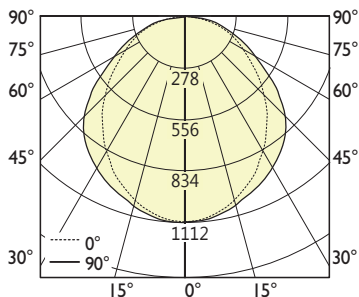

Dimensions: 2' x 2'
Luminaire Lumens: 2888 lm
Input Watts: 26.23 W
Efficacy: 110 lm/W
CCT: 3500K

